

# Kolombeschermer - Groot

Axellent biedt een grotere kolombeschermer voor de meest flexibele bescherming voor grotere kolommen. Deze bescherming is standaard geschikt voor vierkante kolommen van 400 mm. Er zijn ook vullingen verkrijgbaar om de bescherming uit te breiden tot 1000 mm vierkant. De kolombeschermer is gemaakt van polyethyleen met een lage dichtheid voor een hoge flexibiliteit en sterkte.



## Models

| ARTICLES / DESCRIPTION                                                              |                                         | WIDTH (MM) | HEIGHT (MM) |
|-------------------------------------------------------------------------------------|-----------------------------------------|------------|-------------|
|  | <b>AG-CP4-110IN</b><br>Infill, RAL 1003 | 110        |             |
|  | <b>AG-CP4-250IN</b><br>Infill, RAL 1003 | 250        |             |
|  | <b>AG-CP400</b><br>RAL 1003             | 200        | 1080        |



## X-Protect components

These are the building blocks of our modular Impact Protection range.

### BARRIERS & RAILS

#### Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

#### Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

### POSTS & BOLLARDS



**Classic**  
4 connection sides

Height:

350 -

Width:

200 mm

7 7/8"

1160 mm

13 13/16" -

45 11/16"



**Essential**  
2 connection sides

Height:

620 -

Width:

132 mm

5 3/16"

1170 mm

24 7/16" -







46 1/16"



## X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding\*

\* The highest force depends on the C-C. More information is available upon request.

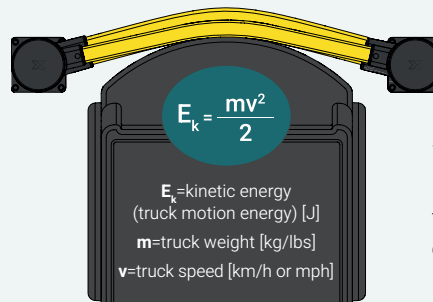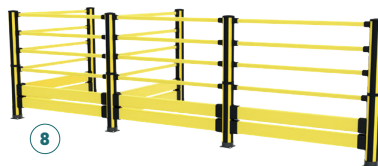


## Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight  
**3600 kg / 7930 lbs**



Loaded weight  
**2700 kg / 5940 lbs**



Loaded weight  
**2100 kg / 4620 lbs**

| Speed             | Load    |
|-------------------|---------|
| 6 km/h   3.7 mph  | 5020 J  |
| 8 km/h   5 mph    | 8880 J  |
| 12 km/h   7.5 mph | 19960 J |

| Speed             | Load    |
|-------------------|---------|
| 6 km/h   3.7 mph  | 3770 J  |
| 8 km/h   5 mph    | 6660 J  |
| 12 km/h   7.5 mph | 14970 J |


| Speed             | Load    |
|-------------------|---------|
| 6 km/h   3.7 mph  | 2930 J  |
| 8 km/h   5 mph    | 5180 J  |
| 12 km/h   7.5 mph | 11670 J |

### Component Colours

● RAL 1018 ● RAL 9011

### Operating temperature

-10°C → 40°C



#### 1. Bollards

- Classic | 5220 J
- Essential | 1500 J

#### 2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

#### 3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

#### 4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

#### 5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

#### 6. Pedestrian Gate | 0 J

#### 7. Column Guard | 1800 J

#### 8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

#### 9. Dock Gate | 10200 J

#### 10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

#### 11. Upright Protector