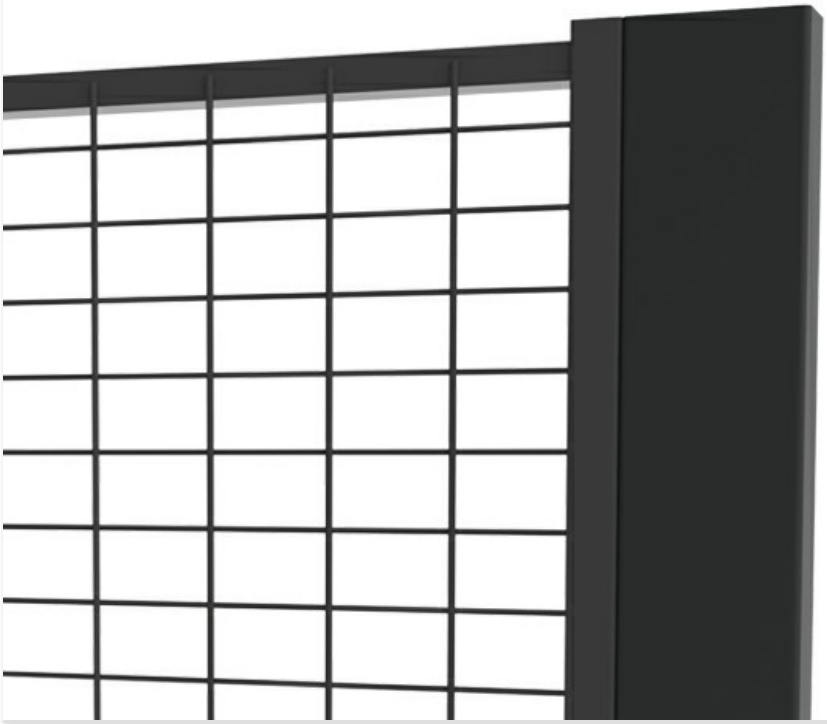
(Einstellbares) Ausgleichsblech

Das Ausgleichsblech ist erhältlich in allen Höhen und in den Breiten 40 mm und 70 mm. Standardfarbe ist Graphitschwarz (RAL 9011) – weitere Farben lassen sich auf Anfrage realisieren.

Das **einstellbare** Ausgleichsblech kann Lücken und Spalten zwischen 40 mm und 145 mm in Ihrem Schutzzaunprojekt ausgleichen. Es hilft Ihnen dabei, eine optimale und individuelle Gesamtlänge Ihrer Schutzeinrichtung zu erreichen. Es ist in den Höhen 1300 mm, 1900 mm und 2200 mm erhältlich.

Graphitschwarz (RAL 9011) - weitere Farben auf Anfrage.



The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.




Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.

Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.

Modelle

Ausgleichsblech 10 artikel

ARTIKEL / BESCHREIBUNG	BREITE (MM)	HÖHE (MM)
 **T02-3-07504**	40	750
 **T02-3-07507**	70	750
 **T02-3-13004**	40	1300
 **T02-3-13007**	70	1300
 **T02-3-19004**	40	1900
 **T02-3-19007**	70	1900
 **T02-3-22004**	40	2200
 **T02-3-22007**	70	2200
 **T02-3-24004**	40	2400
 **T02-3-24007**	70	2400

Einstellbares Ausgleichsblech 5 artikel

ARTIKEL / BESCHREIBUNG	BREITE (MM)	HÖHE (MM)
 **T05-3-07515** 40-145 mm		750
 **T05-3-13015** 40-145 mm		1300

	**T05-3-19015** 40-145 mm	1900
	**T05-3-22015** 40-145 mm	2200
	**T05-3-24015** 40-145 mm	2400