Essential Pedestrian with Two Rails

The X-Protect Essential Pedestrian Barrier with Two Rails safely separates pedestrians from vehicles in light-duty areas. It maintains an open layout, creating clear routes and efficient flow while reducing the risk of collisions.



The Essential Pedestrian Barrier with Two Rails offers reliable separation between pedestrians and moving equipment while maintaining an open and accessible layout. Ideal for areas with lower impact risks, the system helps define safe pedestrian routes and supports efficient traffic flow across the facility.

Improve workplace safety by adding the Floor Barrier to your configuration. Designed to create a clear physical boundary between pedestrian walkways and vehicle routes, it offers effective low-level protection in areas with forklift trucks, AMRs and AGVs. By limiting ground-level contact points, it helps reduce damage from forks and pallets while improving overall traffic organisation.

Installation is straightforward, with a low fixing count that speeds up assembly and minimises disruption to floor surfaces.

Key features

- Fast to install
- Kind to the floor
- Easy to repair

Impact test results					
Area of impact	*Load*	*Equivalent to*		*90° Deflection*	*Force to fixings*
Centre of barrier C-C as below					
2000mm	1700 J	2500 kg 4.2 km/h	1500 kg 5.4 km/h	385mm	5.1kN
Posts					
End post	1300 J	2500 kg 4-6 km/h	1500 kg 4.7 km/h	550mm	4.9kN
Mid post	1300 J	2500 kg 4-6 km/h	1500 kg 4.7 km/h	525mm	4.7kN

Modelle

Posts 3 artikel

ARTIKEL / BESCHREIBUNG	HÖHE (MM)	LÄNGE (MM)	CC (MM)	ANDERE
 **BCC0-116-00P2** Corner post	1160		2000	Compatible with the Floor Barrier
 **BEE0-117-00P2** End post	1170		2000	Compatible with the Floor Barrier
 **BEM0-117-00P2** Mid post	1170		2000	Compatible with the Floor Barrier

Hand rails 5 artikel

ARTIKEL / BESCHREIBUNG	HÖHE (MM)	LÄNGE (MM)	CC (MM)	ANDERE
 **RCP1-027-0050** Hand rail		270	500	
 **RCP1-047-0070** Hand rail		470	700	
 **RCP1-077-0100** Hand rail		770	1000	
 **RCP1-127-0150** Hand rail extrusion, C-C=1500mm, RAL 1018 yellow		1270	1500	

	**RCP1-177-0200** Hand rail extrusion	1170	2000

Verwandte Produkte

RAMMSCHUTZ

Rammschutz-Bodenbarriere



Als eigenständige Lösung konzipiert, bietet sie Schutz für Gebäudeperimeter und wichtige Infrastruktur vor den alltäglichen Gefahren durch Fahrzeugstaplergabeln, Paletten während des Transports, AM...

11 artikel

X-PROTECT

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"


Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"




X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

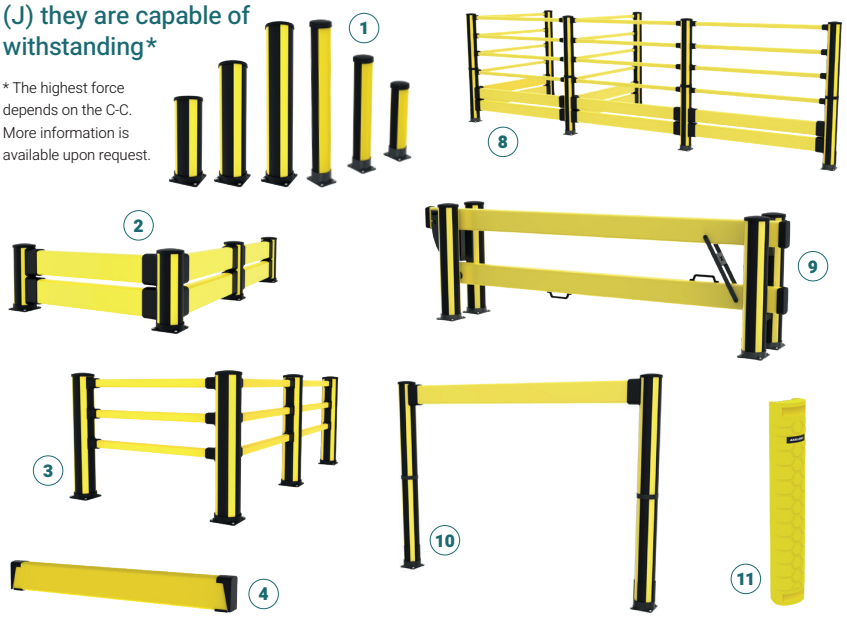

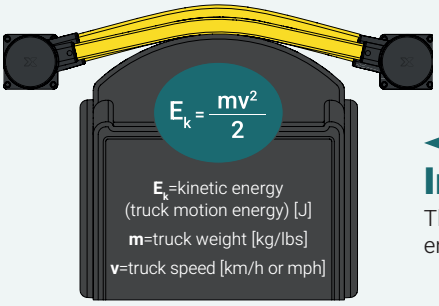


Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C



1. **Bollards**
   - Classic | 5220 J
   - Essential | 1500 J
2. **Impact Barriers**
   - Impact | 4500 J
   - Impact High | 6200 J
   - Double Impact Low | 7700 J
   - Double Impact High | 7000 J
3. **Pedestrian Rails**
   - Pedestrian | 5000 J
   - Essential Pedestrian | 2250 J
   - Essential Pedestrian 2 rail | 1700 J
   - Essential Pedestrian | 2250 J
4. **Floor Barrier** | 2250 J
   - Can be used both with Impact & Pedestrian configurations or as stand-alone protection.
5. **Pedestrian Rails + Impact Barriers**
   - Pedestrian + Impact | 6700 J
   - Pedestrian + Impact High | 8000 J
   - Pedestrian + Double Impact | 8300 J
   - Essential Pedestrian + Impact High | 3100 J
6. **Pedestrian Gate** | 0 J
7. **Column Guard** | 1800 J
8. **Topple Barriers**
   - Pedestrian | 5250 J
   - Impact | 6200 J
9. **Dock Gate** | 10200 J
10. **Height Restrictors**
    - Goal Post | 4200 J
    - Height Guard
11. **Upright Protector**