
Einstellbarer Säulenschutz

Einzigartiger Säulenschutz aus hochflexiblem und robustem Polyethylen niedriger Dichte. Geliefert in vier Abschnitten mit Kunststoff-Querträgern, die vor Ort zugeschnitten werden können, mit Größen von 200 mm bis 700 mm. Der Säulenschutz ist leicht zu montieren und erfordert keine Bodenbefestigung. Schrauben aus rostfreiem Stahl werden standardmäßig mitgeliefert.

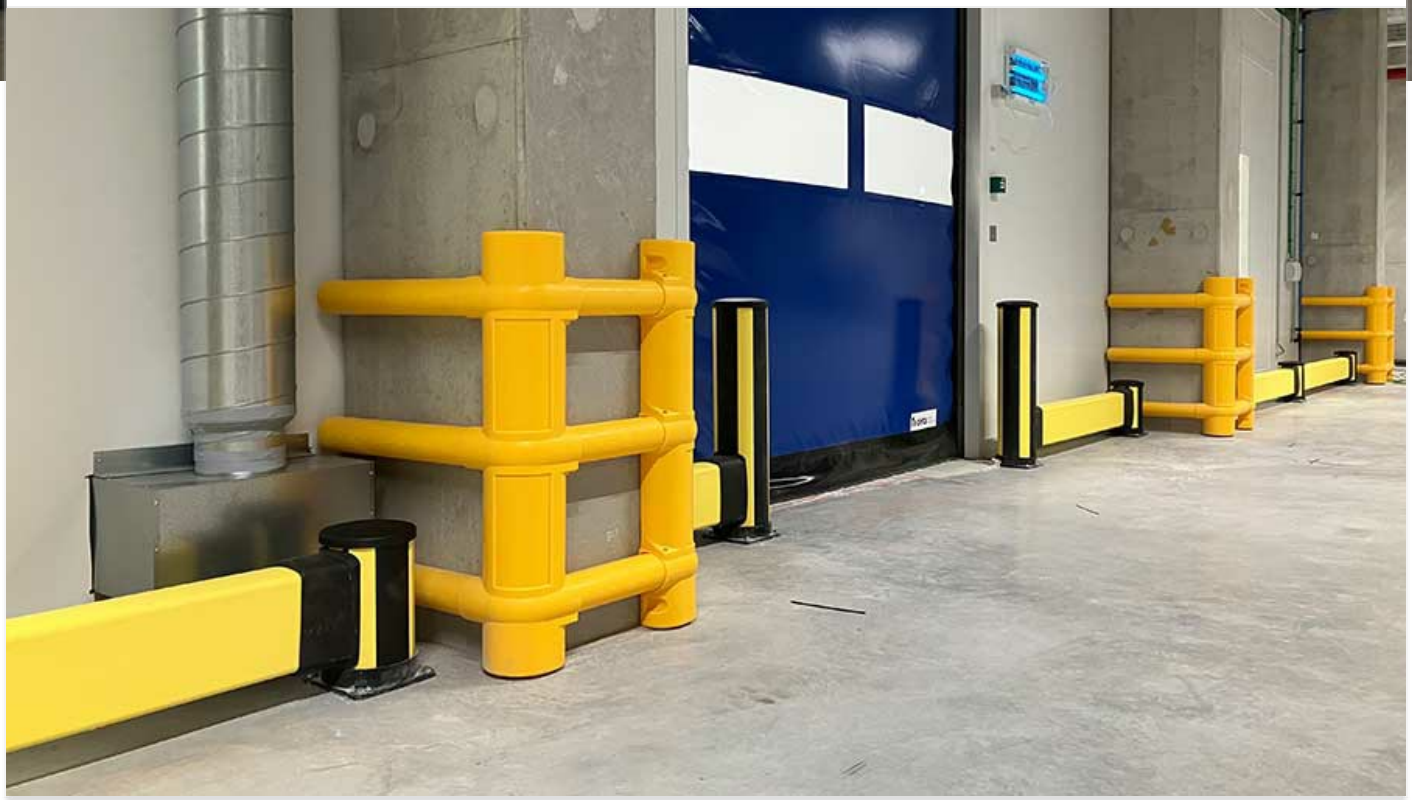

Modelle

ARTIKEL / BESCHREIBUNG	
	**AG-CPU700** RAL 1003

Verwandte Produkte



COLUMN GUARDS

X-Protect Säulenschutz

Sie sollten den Säulenschutz verwenden, wenn Sie die Säulen in Ihrer Einrichtung vor Aufprallschäden schützen müssen. Die einzigartige Konstruktion verfügt über speziell geformte Luftkanäle, die di...

1 artikel



X-PROTECT BOLLARDS

Rammschutz-Poller

X-Protect Bollards safeguard corners, doorways and equipment from vehicle impacts. The black and yellow colour scheme enhances visibility and helps direct forklift traffic, creating safer, well-org...

7 artikel



UPRIGHT PROTECTOR

Pfostenschutzprofil

Das Pfostenschutzprofil hilft dabei, Regalsäulen vor Anfahrschäden durch Gabelstapler und Hubwagen in stark frequentierten Lagerumgebungen zu schützen. Sein energieabsorbierendes Design reduziert S...

3 artikel

X-PROTECT

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"


Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"




X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

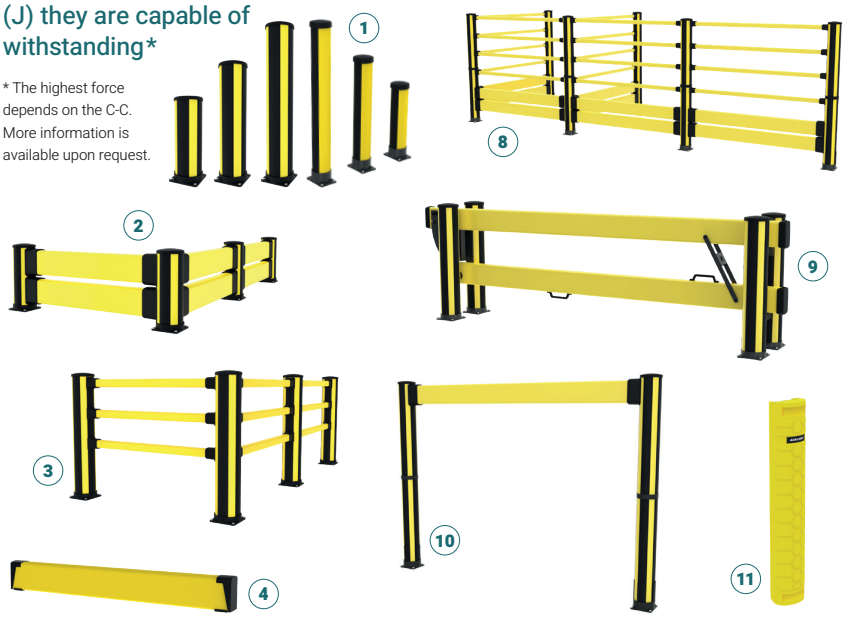

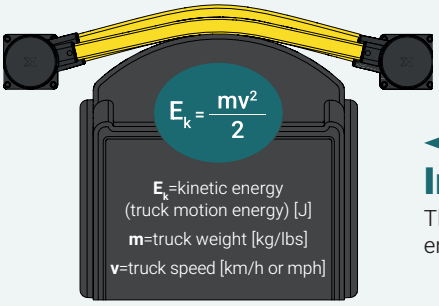


Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C

1. **Bollards**
   - Classic | 5220 J
   - Essential | 1500 J
2. **Impact Barriers**
   - Impact | 4500 J
   - Impact High | 6200 J
   - Double Impact Low | 7700 J
   - Double Impact High | 7000 J
3. **Pedestrian Rails**
   - Pedestrian | 5000 J
   - Essential Pedestrian | 2250 J
   - Essential Pedestrian 2 rail | 1700 J
   - Essential Pedestrian | 2250 J
4. **Floor Barrier** | 2250 J
   - Can be used both with Impact & Pedestrian configurations or as stand-alone protection.
5. **Pedestrian Rails + Impact Barriers**
   - Pedestrian + Impact | 6700 J
   - Pedestrian + Impact High | 8000 J
   - Pedestrian + Double Impact | 8300 J
   - Essential Pedestrian + Impact High | 3100 J
6. **Pedestrian Gate** | 0 J
7. **Column Guard** | 1800 J
8. **Topple Barriers**
   - Pedestrian | 5250 J
   - Impact | 6200 J
9. **Dock Gate** | 10200 J
10. **Height Restrictors**
    - Goal Post | 4200 J
    - Height Guard
11. **Upright Protector**