




Großer Säulenschutz

Axellent bietet einen größeren Säulenschutz an, der den flexibelsten Schutz für größere Säulen bietet. Dieser Schutz ist standardmäßig für 400mm quadratische Säulen geeignet. Es sind auch Füllungen erhältlich, um den Schutz auf bis zu 1000 mm im Quadrat zu erweitern. Der Säulenschutz wird aus Polyethylen niedriger Dichte hergestellt, um eine hohe Flexibilität und Festigkeit zu gewährleisten.



Modelle

ARTIKEL / BESCHREIBUNG	BREITE (MM)	HÖHE (MM)
 AG-CP4-110IN Infill, RAL 1003	110	
 AG-CP4-250IN Infill, RAL 1003	250	
 AG-CP400 RAL 1003	200	1080

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS

Classic
4 connection sides

Height: 350 – 1160 mm
Width: 200 mm | 13 13/16" – 7 7/8" | 45 11/16"



Essential
2 connection sides

Height: 620 – 1170 mm
Width: 132 mm | 24 7/16" – 5 3/16" | 46 1/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

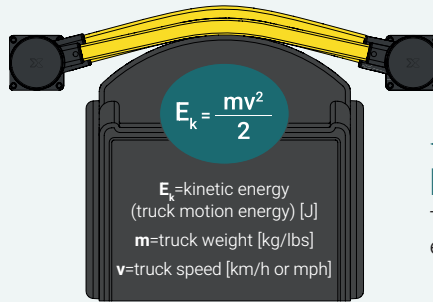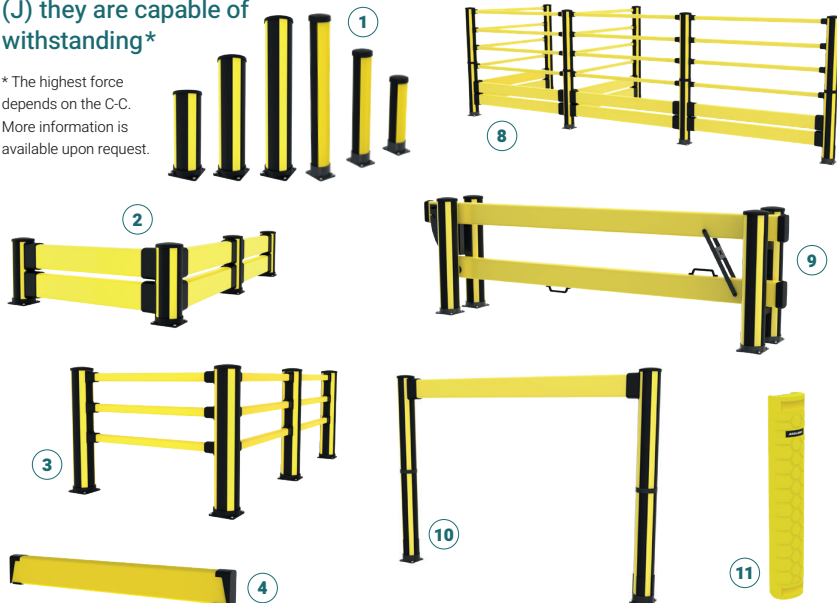

Impact testing

This is how we calculate the energy from a vehicle impact.


Loaded weight 3600 kg / 7930 lbs		Loaded weight 2700 kg / 5940 lbs		Loaded weight 2100 kg / 4620 lbs	
Speed	Load	Speed	Load	Speed	Load
6 km/h 3.7 mph	5020 J	6 km/h 3.7 mph	3770 J	6 km/h 3.7 mph	2930 J
8 km/h 5 mph	8880 J	8 km/h 5 mph	6660 J	8 km/h 5 mph	5180 J
12 km/h 7.5 mph	19960 J	12 km/h 7.5 mph	14970 J	12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C



1. Bollards

- Classic | 5220 J
- Essential | 1500 J

2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

6. Pedestrian Gate | 0 J

7. Column Guard | 1800 J

8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

9. Dock Gate | 10200 J

10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

11. Upright Protector