Essential Pedestrian with three rails

The X-Protect Essential Pedestrian Barrier with Three Rails provides added impact resistance and visibility for safe, well-defined walkways. Ideal for light-duty zones, it enhances separation between people and vehicles while keeping layouts open and efficient.



The Essential Pedestrian Barrier with Three Rails provides an enhanced level of protection for areas where additional height and visibility are required. Designed for light-duty impact zones, it creates safe, well-defined walkways while maintaining an open and efficient layout.

To further improve site safety, the Floor Barrier can be integrated into this configuration. It acts as a solid base element that reinforces the lower section of the system, offering additional protection against ground-level risks such as vehicle forks, pallets and debris. This combination provides a continuous barrier line that enhances both visibility and impact resistance while maintaining smooth traffic flow between zones.

Installation is quick and efficient, with minimal fixings required and no unnecessary stress on the floor surface.

Key features

- Fast to install
- Kind to the floor
- Easy to repair

Impact test results					
Area of impact	*Load*	*Equivalent to*		*90° Deflection*	*Force to fixings*
Centre of barrier C - C as below					
1500mm	2000 J	2500kg 4.6 km/h	1500kg 5.9 km/h	334mm	4.2kN
2000mm	2250 J	2500kg 4.8 km/h	1500kg 5.9 km/h	414mm	5.1kN
Posts					
End post	1300 J	2500kg 3.7 km/h	1500kg 4.7 km/h	550mm	6.1kN
Mid post	1300 J	2500kg 3.7 km/h	1500kg 4.7 km/h	525mm	5.6kN

Modelle

Posts 3 artikel

ARTIKEL / BESCHREIBUNG	HÖHE (MM)	LÄNGE (MM)	CC (MM)	ANDERE
 **BCC0-116-00P3** Corner post	1160		2000	Compatible with the Floor Barrier
 **BEE0-117-00P3** End post	1170		2000	Compatible with the Floor Barrier
 **BEM0-117-00P3** Mid post	1170		2000	Compatible with the Floor Barrier

Hand rails 5 artikel

ARTIKEL / BESCHREIBUNG	HÖHE (MM)	LÄNGE (MM)	CC (MM)	ANDERE
 **RCP1-027-0050** Hand rail		270	500	
 **RCP1-047-0070** Hand rail		470	700	
 **RCP1-077-0100** Hand rail		770	1000	
 **RCP1-127-0150** Hand rail extrusion, C-C=1500mm, RAL 1018 yellow		1250	1500	

	**RCP1-177-0200** Hand rail extrusion	1170	2000

Verwandte Produkte

RAMMSCHUTZ

Rammschutz-Bodenbarriere



Als eigenständige Lösung konzipiert, bietet sie Schutz für Gebäudeperimeter und wichtige Infrastruktur vor den alltäglichen Gefahren durch Fahrzeugstaplergabeln, Paletten während des Transports, AM...

11 artikel

X-PROTECT

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"


Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"




X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

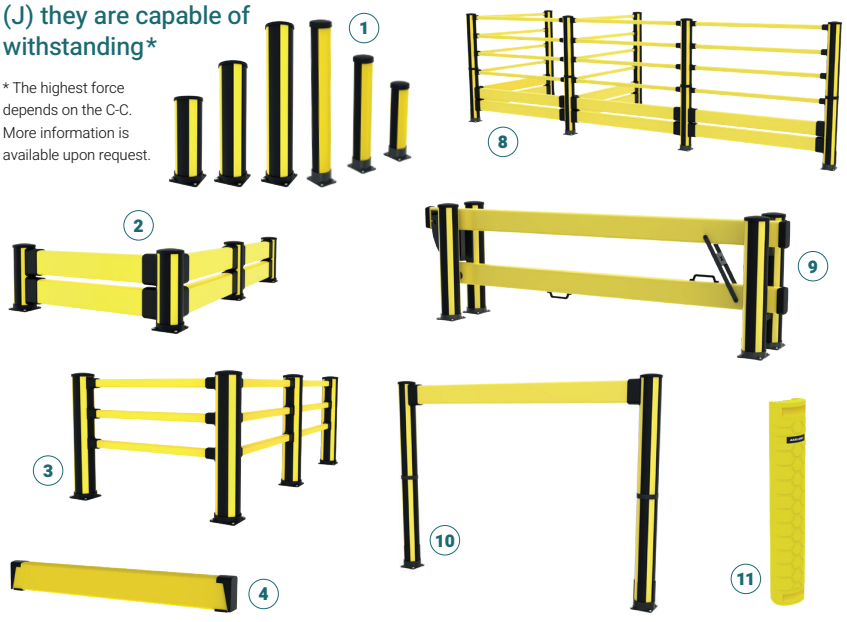

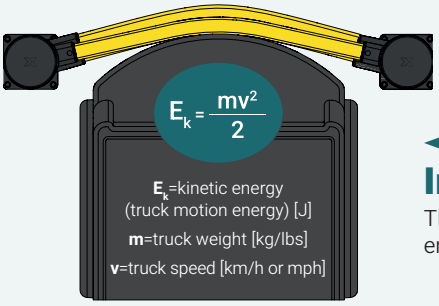


Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C



1. **Bollards**
   - Classic | 5220 J
   - Essential | 1500 J
2. **Impact Barriers**
   - Impact | 4500 J
   - Impact High | 6200 J
   - Double Impact Low | 7700 J
   - Double Impact High | 7000 J
3. **Pedestrian Rails**
   - Pedestrian | 5000 J
   - Essential Pedestrian | 2250 J
   - Essential Pedestrian 2 rail | 1700 J
   - Essential Pedestrian | 2250 J
4. **Floor Barrier** | 2250 J
   - Can be used both with Impact & Pedestrian configurations or as stand-alone protection.
5. **Pedestrian Rails + Impact Barriers**
   - Pedestrian + Impact | 6700 J
   - Pedestrian + Impact High | 8000 J
   - Pedestrian + Double Impact | 8300 J
   - Essential Pedestrian + Impact High | 3100 J
6. **Pedestrian Gate** | 0 J
7. **Column Guard** | 1800 J
8. **Topple Barriers**
   - Pedestrian | 5250 J
   - Impact | 6200 J
9. **Dock Gate** | 10200 J
10. **Height Restrictors**
    - Goal Post | 4200 J
    - Height Guard
11. **Upright Protector**