


Fyldningsmetalplader faste/justerbare

An infill sheet metal functions as a filler when a guard needs a certain width. Fixed infill pieces are available for all heights and in 40 and 70 mm widths. The adjustable infill piece covers gaps between 40 and 145 mm, offering greater flexibility. The 100 mm interval between our panels means less cutting of panels when an 'odd' gap needs to be filled. The standard colour is black (RAL 9011), but customised colours are available upon request.

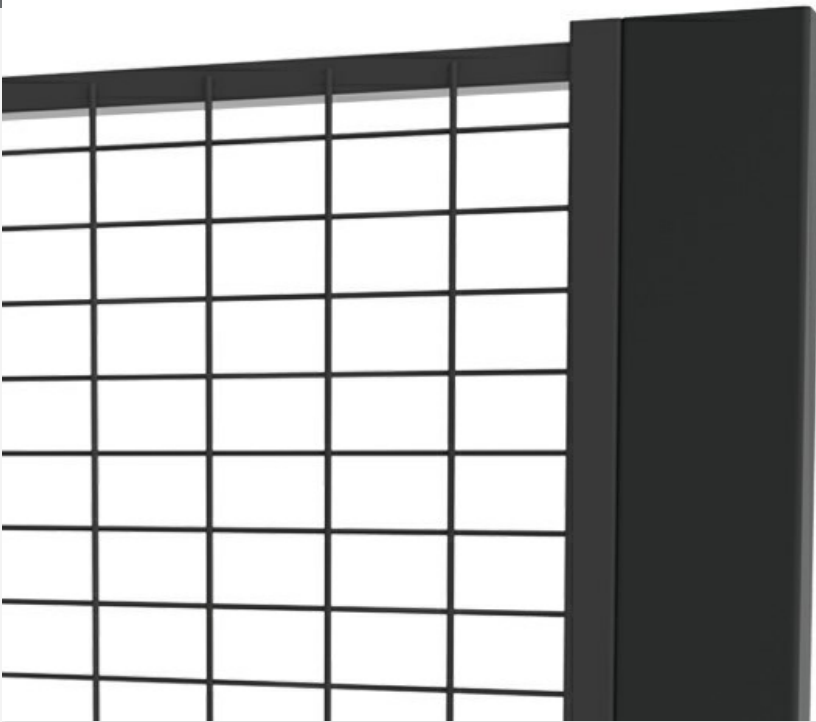

The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.











Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.



Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.

Modeller

Fast udfyldningsmetalplade 10 artikler

ARTIKLER / BESKRIVELSE	BREDDE (MM)	HØJDE (MM)
 T02-3-07504	40	750
 T02-3-07507	70	750
 T02-3-13004	40	1300
 T02-3-13007	70	1300
 T02-3-19004	40	1900
 T02-3-19007	70	1900
 T02-3-22004	40	2200
 T02-3-22007	70	2200
 T02-3-24004	40	2400
 T02-3-24007	70	2400


Justerbar udfyldningsmetalplade 5 artikler

ARTIKLER / BESKRIVELSE	BREDDE (MM)	HØJDE (MM)
 T05-3-07515 40-145 mm		750
 T05-3-13015 40-145 mm		1300




T05-3-19015
40-145 mm

1900



T05-3-22015
40-145 mm

2200



T05-3-24015
40-145 mm

2400