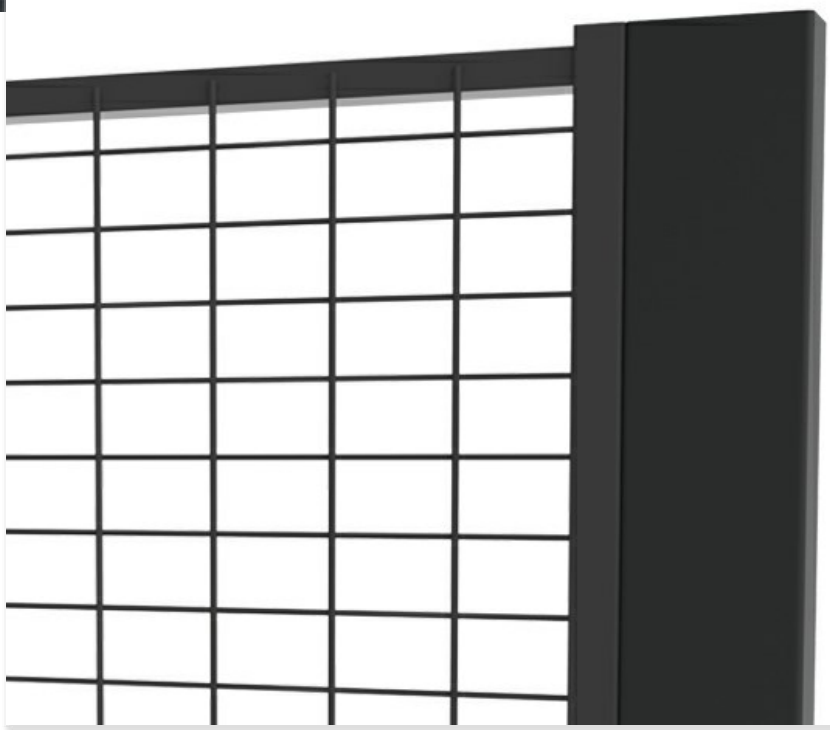
Fyldningsmetalplader faste/justerbare

An infill sheet metal functions as a filler when a guard needs a certain width. Fixed infill pieces are available for all heights and in 40 and 70 mm widths. The adjustable infill piece covers gaps between 40 and 145 mm, offering greater flexibility. The 100 mm interval between our panels means less cutting of panels when an ‘odd’ gap needs to be filled. The standard colour is black (RAL 9011), but customised colours are available upon request.



The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.




Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.

Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.

Modeller

Fast udfyldningsmetalplade 10 artikler

ARTIKLER / BESKRIVELSE	BREDDE (MM)	HØJDE (MM)
 **T02-3-07504**	40	750
 **T02-3-07507**	70	750
 **T02-3-13004**	40	1300
 **T02-3-13007**	70	1300
 **T02-3-19004**	40	1900
 **T02-3-19007**	70	1900
 **T02-3-22004**	40	2200
 **T02-3-22007**	70	2200
 **T02-3-24004**	40	2400
 **T02-3-24007**	70	2400

Justerbar udfyldningsmetalplade 5 artikler

ARTIKLER / BESKRIVELSE	BREDDE (MM)	HØJDE (MM)
 **T05-3-07515** 40-145 mm		750
 **T05-3-13015** 40-145 mm		1300

	**T05-3-19015** 40-145 mm	1900
	**T05-3-22015** 40-145 mm	2200
	**T05-3-24015** 40-145 mm	2400