

X-Protect Søjleværn

Du bør bruge søjleværn, når du skal beskytte søjlerne i din bygning mod slagskader. Den unikke konstruktion har specielt udformede luftkanaler, der effektivt fordeler kræfterne fra slag.

De sammenlåsende sektioner er modulopbyggede, hvilket gør Column Guard let at montere og garanterer en tæt pasform til alle sider af søjlen for at spare plads. Afslut installationen med justerbare stropper for at holde afskærmningen sikkert på plads.




X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

Modeller

ARTIKLER / BESKRIVELSE		HØJDE (MM)	FARVE
	CCP1-015-0038 Till søjler fra 150-375 mm	900	Zinc Yellow (RAL 1018)

Relaterede produkter




X-GUARD PULLERTER TIL MASKINAFSKAERMNING

X-Guard Pullerter til maskinafskaermning

Brug vores X-Protect pullerter til at beskytte døråbninger, udsatte hjørner og maskiner. De sorte og gule pullerter tiltrækker også gaffeltruckførerens opmærksomhed og fungerer som vejledning langs...

6 artikler



CLASSIC SIKKERHEDSVÆRN

Sikkerhedsværn

Brug sikkerhedsværn til at definere fodgængerbaner og beskytte mod lette stød.

9 artikler



KOLLISIONSVÆRN

Kollisionssbarriere

Brug kollisionssbarriere til beskyttelse ved gulvniveau. Den er ideel til adskillelse af lette køretøjer og definere lagerzoner. Vores modulære skinner og pullerter gør det muligt at udskifte...

12 artikler



PULLERT

Pullerter

X-Protect-pullerter beskytter hjørner, døråbninger og udstyr mod påkørsel af køretøjer. Det sorte og gule farveskema øger synligheden og hjælper med at dirigere gaffeltrucktrafikken, hvilket skaber...

7 artikler

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Height:

350 -

Width:

200 mm

7 7/8"

1160 mm

13 13/16" -

45 11/16"



Essential

2 connection sides

Height:

620 -

Width:

132 mm

5 3/16"

1170 mm

24 7/16" -







46 1/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

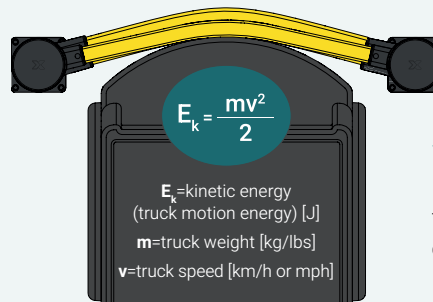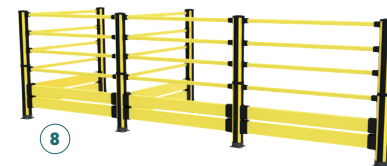

$$E_k = \frac{mv^2}{2}$$

E_k = kinetic energy (truck motion energy) [J]

m = truck weight [kg/lbs]

v = truck speed [km/h or mph]

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight

3600 kg / 7930 lbs



Loaded weight

2700 kg / 5940 lbs



Loaded weight

2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J


Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C



1. Bollards

- Classic | 5220 J
- Essential | 1500 J

2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

6. Pedestrian Gate | 0 J

7. Column Guard | 1800 J

8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

9. Dock Gate | 10200 J

10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

11. Upright Protector