


X-Guard Pullerter til maskinafskærmning

Brug vores X-Protect pullerter til at beskytte døråbninger, udsatte hjørner og maskiner. De sorte og gule pullerter tiltrækker også gaffeltruckførerens opmærksomhed og fungerer som vejledning langs færdselsveje.

Hvis du har installeret vores maskinafskærmning X-Guard, er det let at integrere det med vores X-Protect program. Tilslutningspullerter fås i tre højder, så den passer til vores mest udbredte panelmuligheder. Som fortsættelse af pullerten kan du derefter vælge en hvilken som helst konfiguration af X-Protect.

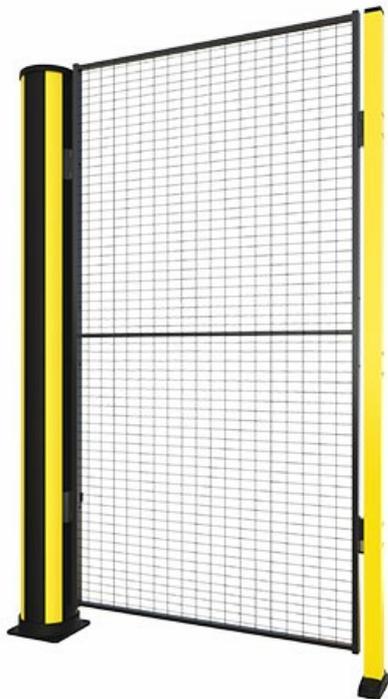


X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

Modeller

ARTIKLER / BESKRIVELSE	BREDDE (MM)	HØJDE (MM)	FARVE
 BCP0-230-0000 Pullert	200	2300	Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCP0-200-0000 Pullert	200	2000	Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCP1-200-0000 Pullert	200	2000	Zinc Yellow (RAL 1018)
 BCP0-140-0000 Pullert	200	1400	Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCP1-140-0000 Pullert	200	1400	Zinc Yellow (RAL 1018)
 CCS3-230-XGC X-Guard Connection		2300	Graphite Black (RAL 9011)
 CCS3-200-XGC X-Guard Connection		2000	Graphite Black (RAL 9011)
 CCS1-200-XGC X-Guard Connection		2000	Zinc Yellow (RAL 1018)
 CCS3-140-XGC X-Guard Connection		1400	Graphite Black (RAL 9011)

Relaterede produkter



PANELS

Netpanel

Netpaneler kommer i to størrelser af net; Premium 50x20 og Classic 50x30 mm. Sikkerhedsafstanden bestemmer størrelsen på det krævede net. Det klassiske 50x30 net kræver en minimumsafstand på 200 mm...

75 artikler



PÅKØRSELSBESKYTTELSE

Påkørselsbarriere

Brug påkørselsbarrieretil beskyttelse ved gulvniveau. Den er ideel til adskillelse af lette køretøjer og definere lagerzoner. Vores modulære skinner og pullerter gør det muligt at udskifte bes...

15 artikler



PÅKØRSELSBESKYTTELSE

Påkørselsbarriere, høj

Brug påkørselsbarriere, høj til beskyttelse i større højder. Den er ideel til adskillelse af lette køretøjer og definere lagerzoner.Vores modulære skinner og pullerter gør det muligt at udskifte be...

15 artikler



PULLERT

Pullerter

X-Protect-pullerter beskytter hjørner, døråbninger og udstyr mod påkørsel af køretøjer. Det sorte og gule farveskema øger synligheden og hjælper med at dirigere gaffeltrucktrafikken, hvilket skaber...

11 artikler

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
 4 connection sides
 Width:
 200 mm
 7 7/8"

Height:
 350 -
 1160 mm
 13 13/16" -
 45 11/16"



Essential
 2 connection sides
 Width:
 132 mm
 5 3/16"





Height:
 620 -
 1170 mm
 24 7/16" -
 46 1/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

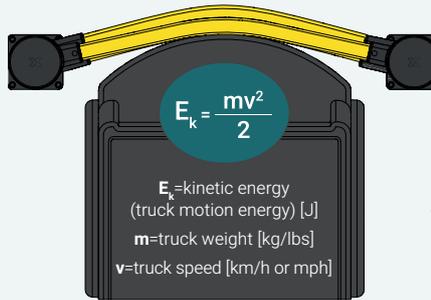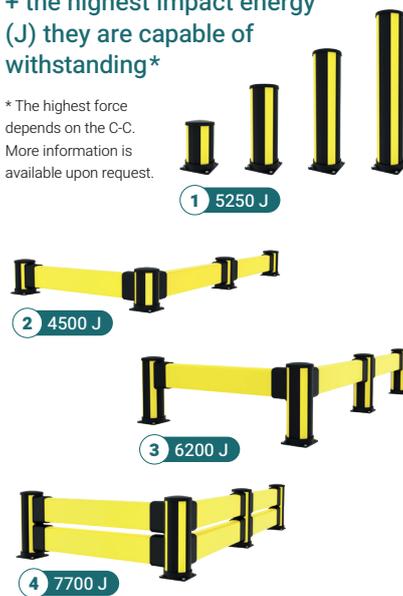

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs



Loaded weight
2700 kg / 5940 lbs



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J



Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C

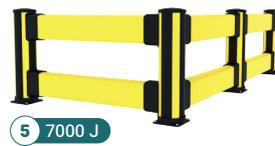

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

* The Floor Barrier can be used in combination with configurations: **3, 6, 8 & 9**