

Stor søjleværn

Axelent tilbyder en større søjleværn, som giver den mest fleksible beskyttelse til større søjler. Denne beskyttelse er som standard egnet til 400 mm firkantede søjler. Der kan også fås udfyldninger til at udvide beskyttelsen op til 1000 mm i kvadrat. Søjleværnen er fremstillet i polyethylen med lav densitet for at give høj fleksibilitet og styrke.



Modeller

ARTIKLER / BESKRIVELSE		BREDDE (MM)	HØJDE (MM)
	AG-CP4-110IN Infill, RAL 1003	110	
	AG-CP4-250IN Infill, RAL 1003	250	
	AG-CP400 RAL 1003	200	1080

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides

Height:

350 -

Width:

200 mm

7 7/8"

1160 mm

13 13/16" -

45 11/16"



Essential
2 connection sides

Height:

620 -

Width:

132 mm

5 3/16"

1170 mm

24 7/16" -






46 1/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

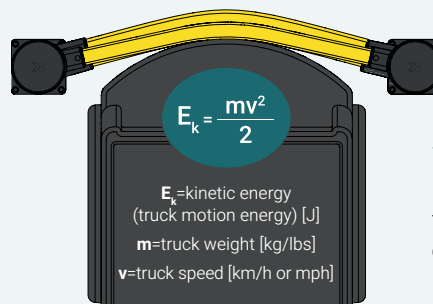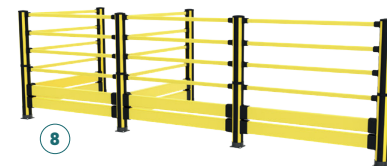

$$E_k = \frac{mv^2}{2}$$

E_k = kinetic energy (truck motion energy) [J]

m = truck weight [kg/lbs]

v = truck speed [km/h or mph]

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight

3600 kg / 7930 lbs



Loaded weight

2700 kg / 5940 lbs



Loaded weight

2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J


Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C



1. Bollards

- Classic | 5220 J
- Essential | 1500 J

2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

6. Pedestrian Gate | 0 J

7. Column Guard | 1800 J

8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

9. Dock Gate | 10200 J

10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

11. Upright Protector