Skæreskabelon

Vores skæreskabelon til X-Protect-serien er specifikt designet til at opretholde præcisionen i dine sikkerhedstegninger. Fremstillet med skarphed og brugervenlighed for øje, effektiviserer dette værktøj installationsprocessen og gør det nemt at justere længderne efter dine specifikke behov uden at gå på kompromis med sikkerhedskvaliteten.

Denne mall er primært beregnet til brug ved tilpasninger af påkørselsbeskyttelse.

Vores skæreskabelon til X-Protect-serien er specielt designet til at opretholde præcisionen i dine sikkerhedsdesigns. Fremstillet med skarphed og brugervenlighed for øje, effektiviserer dette værktøj installationsprocessen og gør det enkelt at justere længder efter dine specifikke behov uden at gå på kompromis med sikkerhedskvaliteten.

Denne mal er primært beregnet til brug ved ændringer af påkørselsbeskyttelse.

Skæreskabelon er udviklet til at garantere, at hullerne til forbindelsesstolperne placeres korrekt hver gang. Denne opmærksomhed på detaljer sikrer, at påkørselsbeskyttelsen bevarer sine fulde beskyttelsesegenskaber, selv efter justeringer i længden. Med dette værktøj kan risikoen for fejlagtigt placerede komponenter minimeres, og muligheden for en problemfri og glat installation kan maksimeres.

Ved at forenkle opgaven med at skære barriererne til den ønskede længde sparer boremallen ikke kun tid, men reducerer også arbejdskraftomkostningerne og minimerer fejlrummet. Dens intuitive design betyder, at den let kan bruges på stedet, hvilket sikrer en hurtig og præcis justeringsproces, der holder dit projekt på planen uden at gå på kompromis med sikkerheden.

Modeller

ARTIKLER / BESKRIVELSE	
	RC-DRILL Drilling template and drill bit kit

X-PROTECT

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails

Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers

Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS

Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"

Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

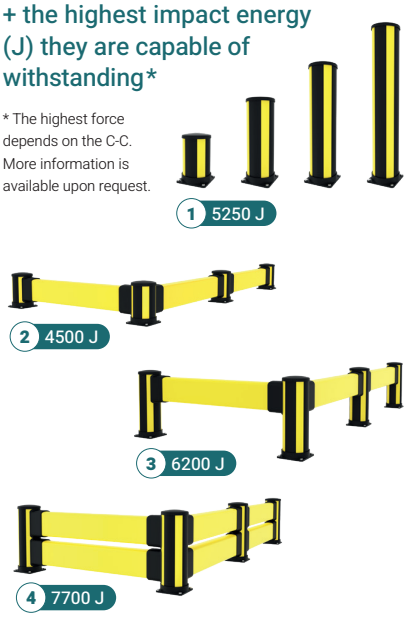

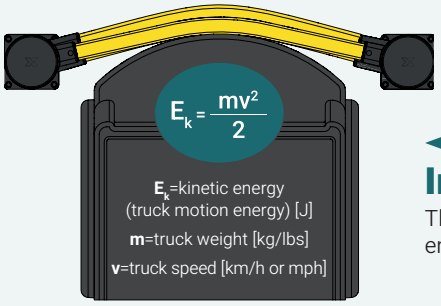

Impact testing

This is how we calculate the energy from a vehicle impact.

Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J

Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C

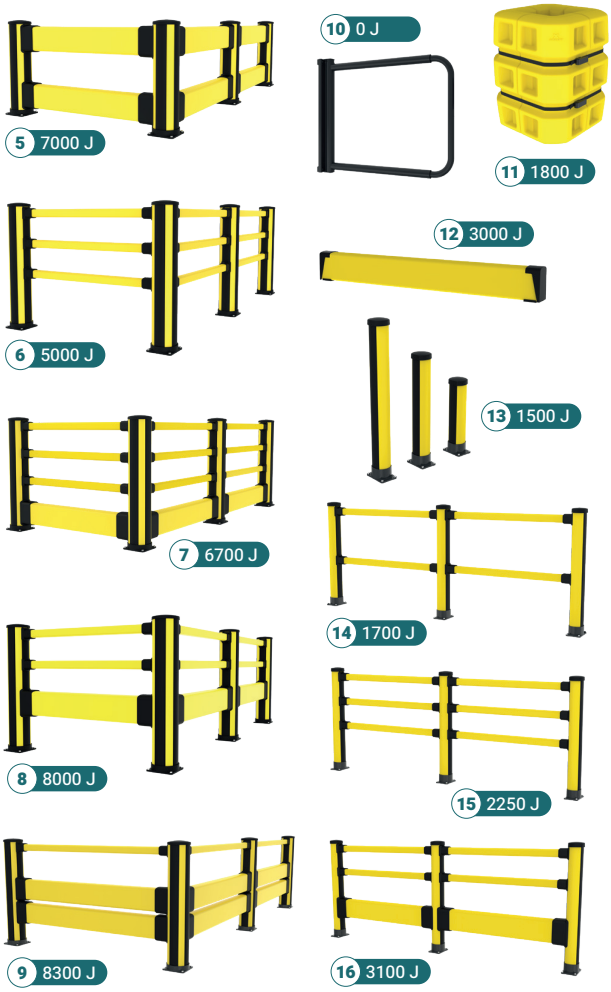

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian +Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

* The Floor Barrier can be used in combination with configurations:
3, 6, 8 & 9