


Dobbelt kollisionsbarriere, lav

Brug dobbelt kollisionsbarriere, lav-konfigurationen til at beskytte konstruktioner mod kraftige påvirkninger i gulvhøjde. Det er en af vores stærkeste konfigurationer af kollisionsbeskyttelse. Den er ideel til beskyttelse af pallereoler.

Vores modulære skinner og pullerter gør det muligt at udskifte beskadigede eller slidte dele på komponentniveau. Hvis du har brug for at udskifte en komponent - kan den blot skydes på plads.



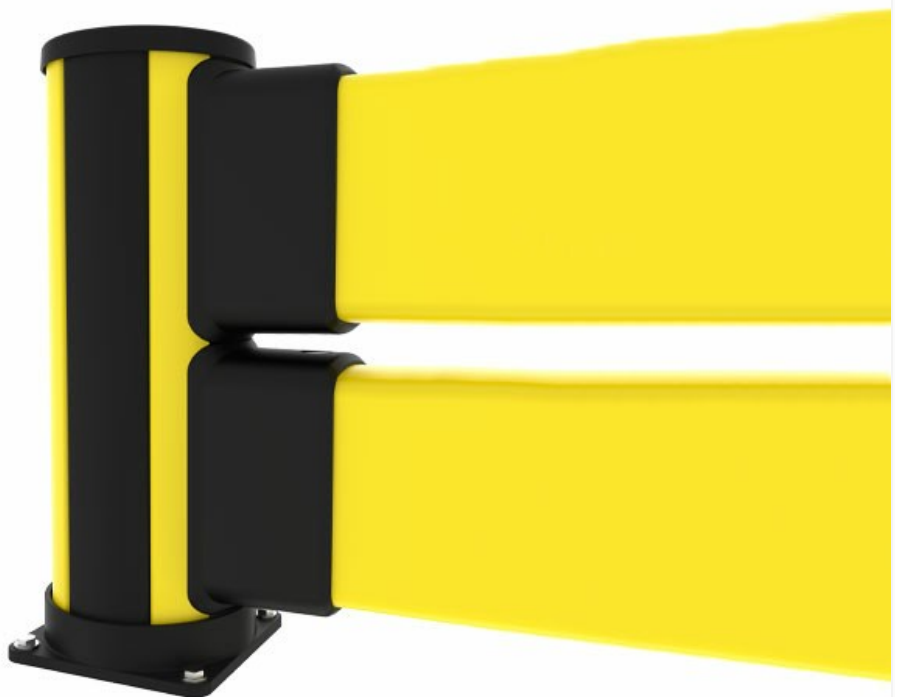


X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

Impact test results					
Area of impact	Load	Equivalent to		90° Deflection	Force to fixings
Centre of barrier C - C as below					
2000mm	7700 J	2500 kg 8.9 km/h	5000 kg 6.3 km/h	340mm	15.5 kN
2500mm	7000 J	2500 kg 8.5 km/h	5000 kg 6 km/h	390mm	10.7 kN
3000mm	6700 J	2500 kg 8.3 km/h	5000 kg 5.8 km/h	440mm	8.6 kN
Posts					
End post	5800 J	2500 kg 7.7 km/h	5000 kg 5.4 km/h	NA *	15.3 kN
Mid post	5800 J	2500 kg 7.7 km/h	5000 kg 5.4 km/h	NA *	15.5 kN



* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

Modeller

Posts 3 artikler

ARTIKLER / BESKRIVELSE	HØJDE (MM)	LÆNGDE (MM)	CC (MM)	FARVE
 BCE0-061-I200 Double Impact L-ende	610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCM0-061-I200 Double Impact L midte	610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCC0-061-I200 Dobbelt Impact L hjørne	610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

Impact rails 9 artikler

ARTIKLER / BESKRIVELSE	HØJDE (MM)	LÆNGDE (MM)	CC (MM)	FARVE
 RCI1-027-0050 Impact ekstrudering		270	500	Zinc Yellow (RAL 1018)
 RCI1-047-0070 Impact ekstrudering		470	700	Zinc Yellow (RAL 1018)

	RCI1-067-0090 Impact rail	670	900	Zinc Yellow (RAL 1018)
	RCI1-077-0100 Impact ekstrudering	770	1000	Zinc Yellow (RAL 1018)
	RCI1-127-0150 Impact ekstrudering	1270	1500	Zinc Yellow (RAL 1018)
	RCI1-177-0200 Impact ekstrudering	1770	2000	Zinc Yellow (RAL 1018)
	RCI1-197-0220 Impact rail	1970	2200	Zinc Yellow (RAL 1018)
	RCI1-227-0250 Impact ekstrudering	2270	2500	Zinc Yellow (RAL 1018)
	RCI1-277-0300 Impact ekstrudering	2770	3000	Zinc Yellow (RAL 1018)

Relaterede produkter



KOLLISIONSVÆRN

Dobbelt kollisionsbarriere

Brug Dobbelt kollisionsbarriere-konfigurationen til at beskytte konstruktioner mod kraftige påvirkninger i større højde. Det er en af vores stærkeste konfigurationer af kollisionsbeskyttelse. ...

12 artikler



CLASSIC SIKKERHEDSVÆRN

Sikkerhedsværn med barriere

Brug sikkerhedsværn med barriere til at beskytte gangbaner mod mellemstore køretøjer, hvor der er en øget risiko for kollisioner i gulvniveau. Denne konfiguration er kompatibel med gulvbarrieren. ...

16 artikler



KOLLISIONSVÆRN

Kollisionsbarriere, høj

Brug kollisionsbarriere, høj til beskyttelse i større højder. Den er ideel til adskillelse af lette køretøjer og definere lagerzoner. Vores modulære skinner og pullerter gør det muligt at udskifte...

13 artikler



KOLLISIONSVÆRN

Kollisionsbarriere

Brug kollisionsbarriere til beskyttelse ved gulvniveau. Den er ideel til adskillelse af lette køretøjer og definere lagerzoner. ... Vores modulære skinner og pullerter gør det muligt at udskifte...

12 artikler

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS

Classic
 4 connection sides

Height: 350 – 1160 mm
 Width: 200 mm | 13 13/16" – 7 7/8" | 45 11/16"

Essential
 2 connection sides

Height: 620 – 1170 mm
 Width: 132 mm | 24 7/16" – 5 3/16" | 46 1/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.



Impact testing

This is how we calculate the energy from a vehicle impact.

Loaded weight
3600 kg / 7930 lbs

Loaded weight
2700 kg / 5940 lbs

Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J

Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C



1. Bollards

- Classic | 5220 J
- Essential | 1500 J

2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

6. Pedestrian Gate | 0 J

7. Column Guard | 1800 J

8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

9. Dock Gate | 10200 J

10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

11. Upright Protector