


Multifunction Column Guard

The Multifunction Column Guard is designed to protect large building columns and pillars from impacts caused by forklifts and other material handling equipment. With asymmetrical on-site adjustment from 250-700mm, it can be tailored to fit various sizes.

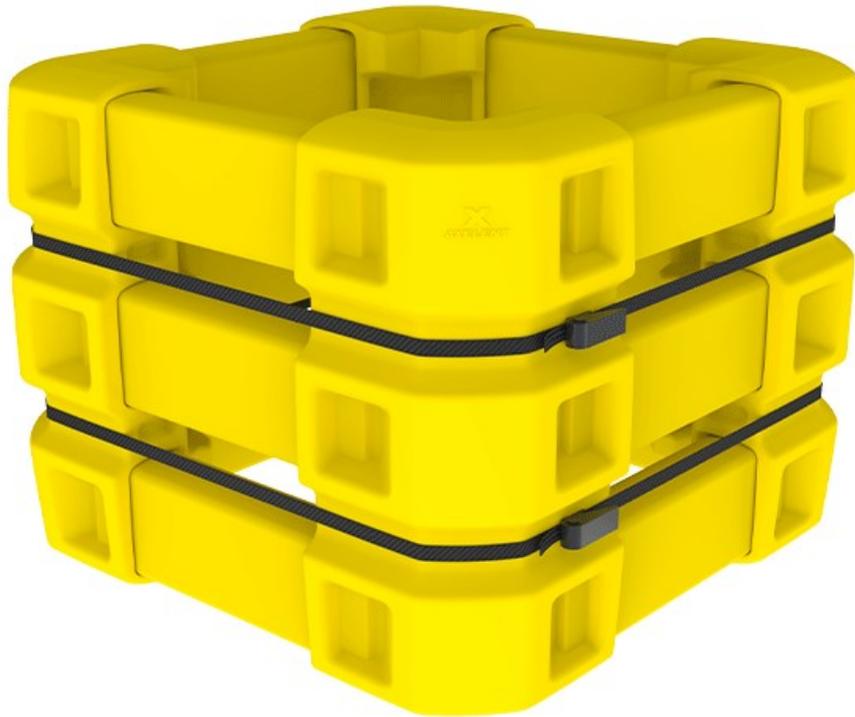

Flexible protection for columns and pillars

The modular design allows for quick installation and easy repairs while ensuring a tight fit to save space. These guards are built to stop vehicles like forklifts, protect columns, and withstand heavy use.

Key Features:

-
-
- **Asymmetrical Adjustment:** Accommodates widths from 250mm to 700mm, offering flexibility for various column sizes.
- **Customizable Dimensions:** Easily tailored by cutting the rails that form its sides, providing a precise fit for any environment.

- **Impact Resistance:** Effectively stops vehicles, such as forklifts, eliminating or minimizing damage.

- **Floor Protection:** Shields flooring around columns to maintain structural integrity.

- **Ease of Installation and Repair:** Designed for quick setup and effortless repairs when needed.

- **End-of-Life Sustainability:** Simplified disassembly and material separation for eco-friendly disposal.

Models

ARTICLES / DESCRIPTION	MIN WIDTH (MM)	MAX WIDTH (MM)	HEIGHT (MM)	COLOR
 CCP1-025	250	731	910	Zinc Yellow (RAL 1018)
 CCP1-025-0030	250	778	910	Zinc Yellow (RAL 1018)
 CCP1-025-0070	300	1178	910	Zinc Yellow (RAL 1018)

Related products



COLUMN GUARDS

X-protect Column guard

Use the X-Protect Column Guard when you need to protect the columns in your facility from impact damage. The unique design features specially formed air channels that effectively dissipate impact f...

[1 articles](#)



COLUMN GUARDS

Large column guard

Axelent offer a larger column guard for the most flexible protection for larger columns. This guard is suitable for 400mm square columns as standard. There are also infills available to extend the...

[3 articles](#)

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
 4 connection sides
 Width:
 200 mm
 7 7/8"

Height:
 350 -
 1160 mm
 13 13/16" -
 45 11/16"



Essential
 2 connection sides
 Width:
 132 mm
 5 3/16"





Height:
 620 -
 1170 mm
 24 7/16" -
 46 1/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

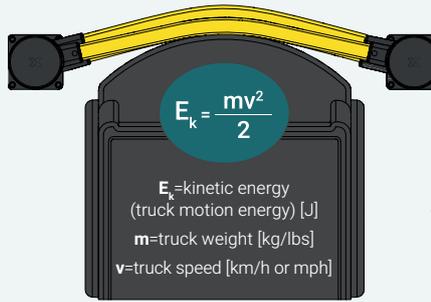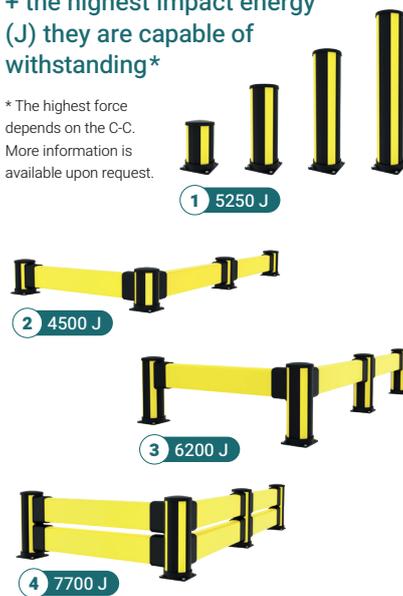

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs



Loaded weight
2700 kg / 5940 lbs



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J




Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C

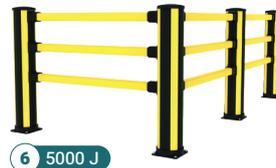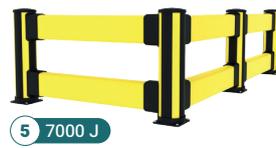

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

* The Floor Barrier can be used in combination with configurations: 3, 6, 8 & 9