
Protector de columna ajustable

Protector de columna único fabricado con polietileno de baja densidad altamente flexible y resistente. Se suministra en cuatro secciones con travesaños de plástico que se pueden cortar para adaptarlos en obra, con tamaños de 200 mm a 700 mm. El protector de columna es de fácil montaje y no requiere fijaciones al suelo. Los tornillos de acero inoxidable se suministran como estándar.

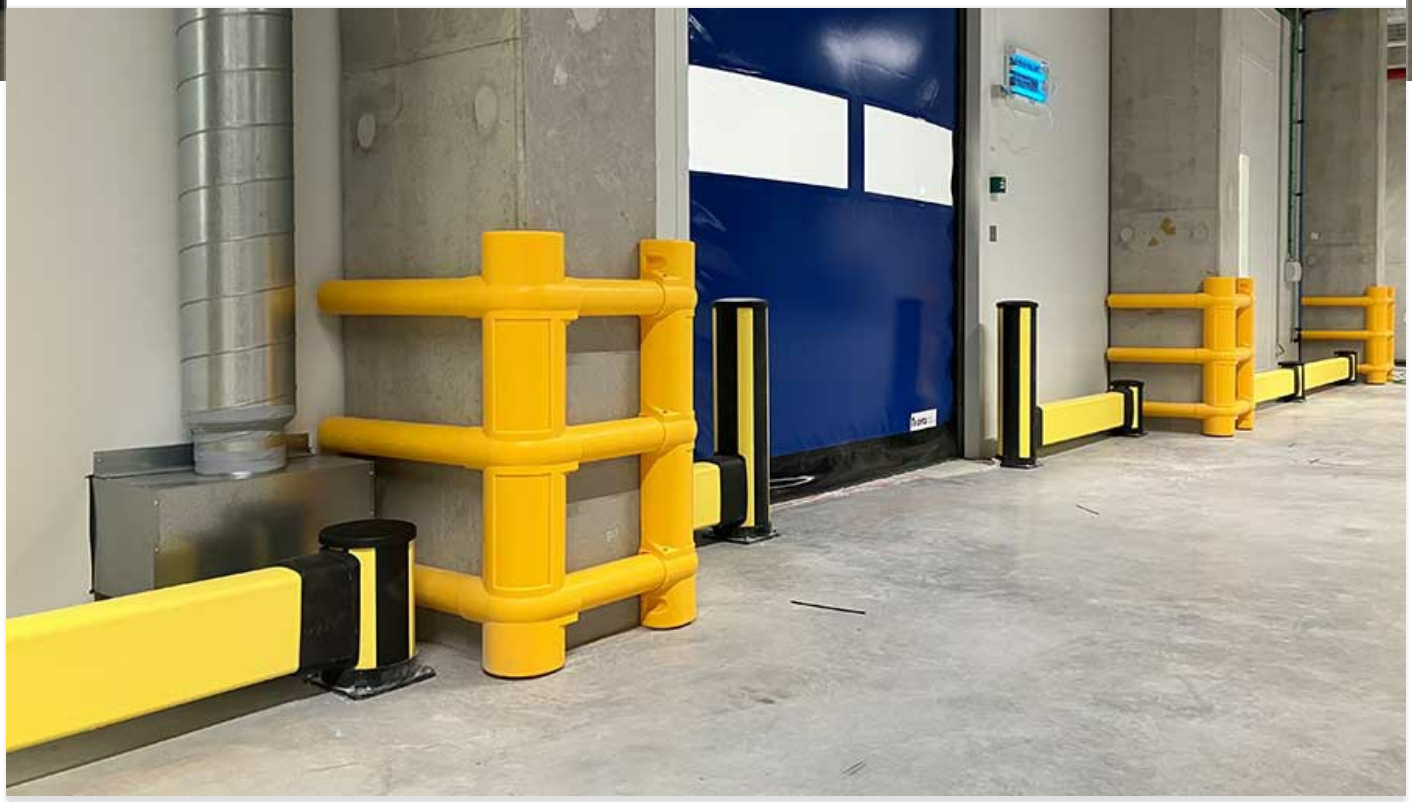

Modelos

ARTÍCULOS / DESCRIPCIÓN	
	**AG-CPU700** RAL 1003

Productos relacionados



COLUMN GUARDS

Protector de columnas

Debe usar el protector de columnas cuando necesite proteger las columnas de su instalación de los daños por impacto. El diseño único presenta canales de aire especialmente formados que disipan las...

1 artículos



X-PROTECT BOLLARDS

Bolardos

Los bolardos X-Protect protegen esquinas, puertas y equipos frente a impactos de vehículos. Su esquema de color negro y amarillo mejora la visibilidad y ayuda a dirigir el tráfico de carretillas, c...

7 artículos



UPRIGHT PROTECTOR

Protector de montantes

El protector de montantes ayuda a proteger los montantes de las estanterías frente a impactos de carretillas elevadoras y transpaletas en entornos de almacén con alta actividad. Su diseño de absorc...

3 artículos

X-PROTECT

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"


Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"




X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

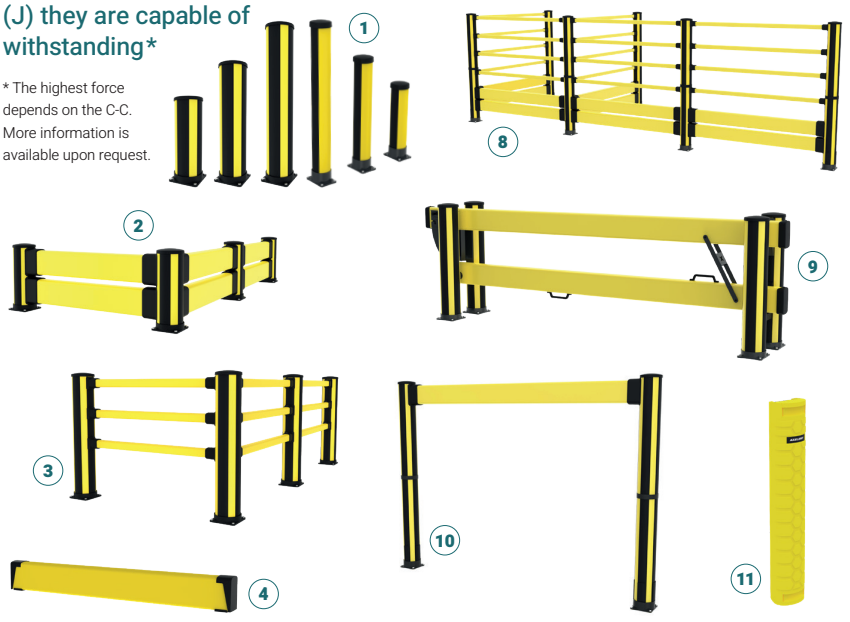

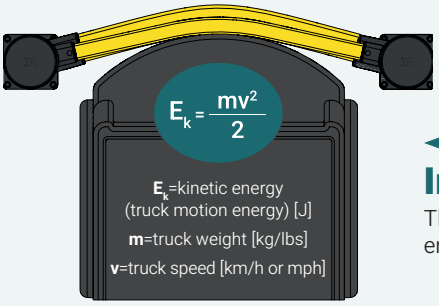


Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C

1. **Bollards**
   - Classic | 5220 J
   - Essential | 1500 J
2. **Impact Barriers**
   - Impact | 4500 J
   - Impact High | 6200 J
   - Double Impact Low | 7700 J
   - Double Impact High | 7000 J
3. **Pedestrian Rails**
   - Pedestrian | 5000 J
   - Essential Pedestrian | 2250 J
   - Essential Pedestrian 2 rail | 1700 J
   - Essential Pedestrian | 2250 J
4. **Floor Barrier** | 2250 J
   - Can be used both with Impact & Pedestrian configurations or as stand-alone protection.
5. **Pedestrian Rails + Impact Barriers**
   - Pedestrian + Impact | 6700 J
   - Pedestrian + Impact High | 8000 J
   - Pedestrian + Double Impact | 8300 J
   - Essential Pedestrian + Impact High | 3100 J
6. **Pedestrian Gate** | 0 J
7. **Column Guard** | 1800 J
8. **Topple Barriers**
   - Pedestrian | 5250 J
   - Impact | 6200 J
9. **Dock Gate** | 10200 J
10. **Height Restrictors**
    - Goal Post | 4200 J
    - Height Guard
11. **Upright Protector**