
Säädettävä pilarin kansi

Ainutlaatuinen pilarisuoja, joka on valmistettu erittäin joustavasta ja kestävästä LDPE-muovista (matalatiheyksinen polyeteeni). Suoja toimitetaan neljässä osassa, ja sen muoviset välipalkit voidaan katkaista asennuspaikalla sopivaksi 200–700 mm paksuisiin pilareihin. Pilarisuoja on helppo koota, eikä se vaadi kiinnitystä lattiaan. Ruostumattomat teräspultit sisältyvät toimitukseen.

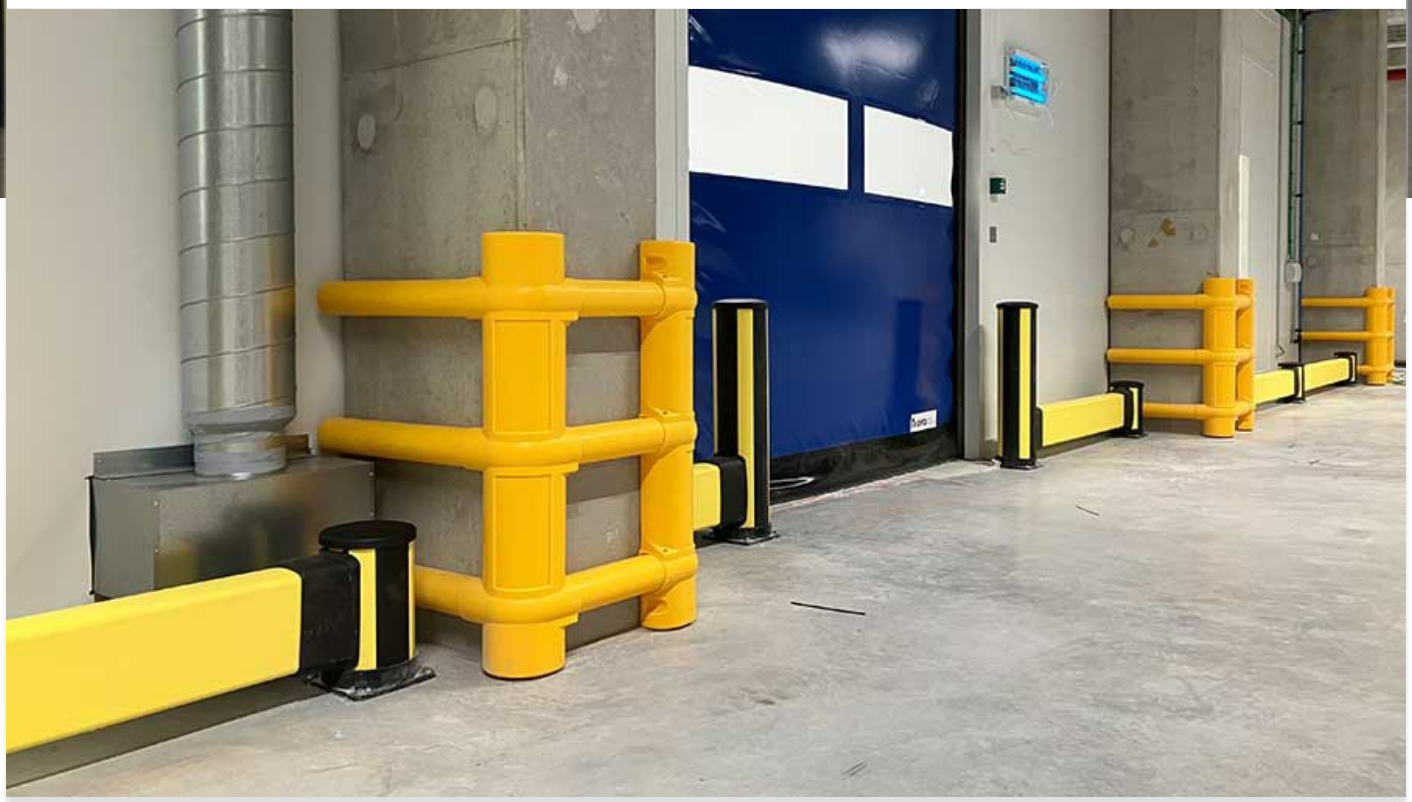

Models

ARTICLES / DESCRIPTION	
	**AG-CPU700** RAL 1003

Related products



PILARISUOJAUS

Pilarisuojaus

Käytä X-Protect-pilarisuojaa, kun haluat suojata tilasi pilarit törmäysvaurioilta. Sen ainutlaatuinen muotoilu sisältää erityiset ilmakanavat, jotka hajottavat törmäysvoimat tehokkaasti. Modulaaris...

1 articles



X-PROTECT PYLVÄS

Pylväs

X-Protect-pylväät suojaavat kulmia, oviaukkoja ja laitteita ajoneuvojen aiheuttamilta vaurioilta. Mustakeltainen väritys parantaa näkyvyyttä ja auttaa ohjaamaan trukkiliikennettä, mikä luo turvalli...

7 articles



PYSTY SUOJAJA

Pystysuuntainen suojus

Pylväänsuoja auttaa suojaamaan hyllystön pylväitä trukkien ja pumppukärryjen törmäyksiltä vilkkaissa varastoympäristöissä. Sen energiaa vaimentava rakenne auttaa vähentämään vaurioita, seisokkiaiko...

3 articles

X-PROTECT

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"


Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"




X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

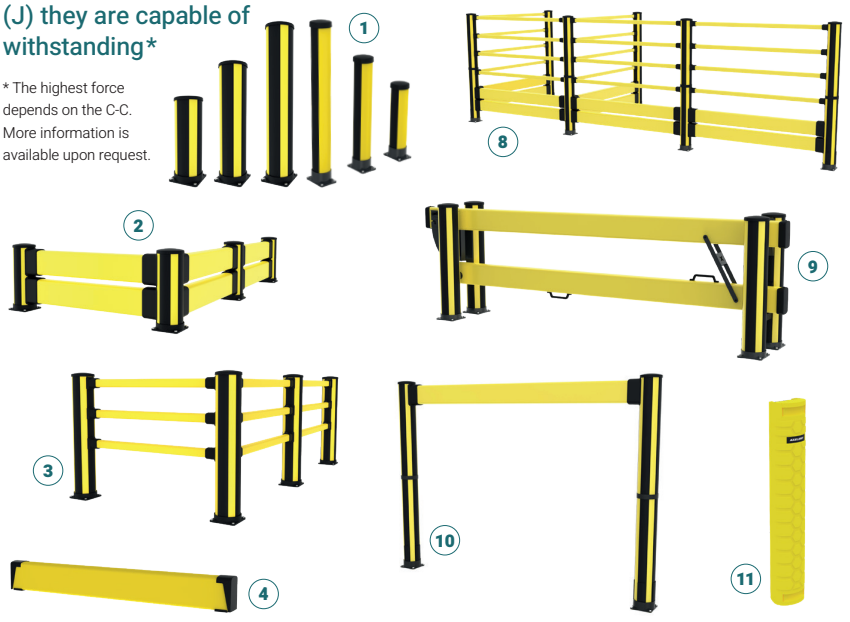

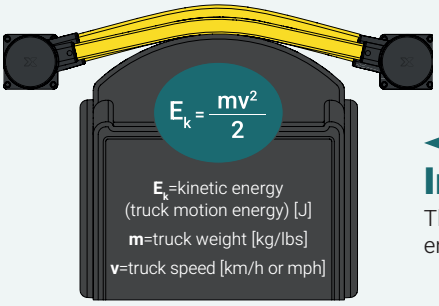


Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C

1. **Bollards**
   - Classic | 5220 J
   - Essential | 1500 J
2. **Impact Barriers**
   - Impact | 4500 J
   - Impact High | 6200 J
   - Double Impact Low | 7700 J
   - Double Impact High | 7000 J
3. **Pedestrian Rails**
   - Pedestrian | 5000 J
   - Essential Pedestrian | 2250 J
   - Essential Pedestrian 2 rail | 1700 J
   - Essential Pedestrian | 2250 J
4. **Floor Barrier** | 2250 J
   - Can be used both with Impact & Pedestrian configurations or as stand-alone protection.
5. **Pedestrian Rails + Impact Barriers**
   - Pedestrian + Impact | 6700 J
   - Pedestrian + Impact High | 8000 J
   - Pedestrian + Double Impact | 8300 J
   - Essential Pedestrian + Impact High | 3100 J
6. **Pedestrian Gate** | 0 J
7. **Column Guard** | 1800 J
8. **Topple Barriers**
   - Pedestrian | 5250 J
   - Impact | 6200 J
9. **Dock Gate** | 10200 J
10. **Height Restrictors**
    - Goal Post | 4200 J
    - Height Guard
11. **Upright Protector**