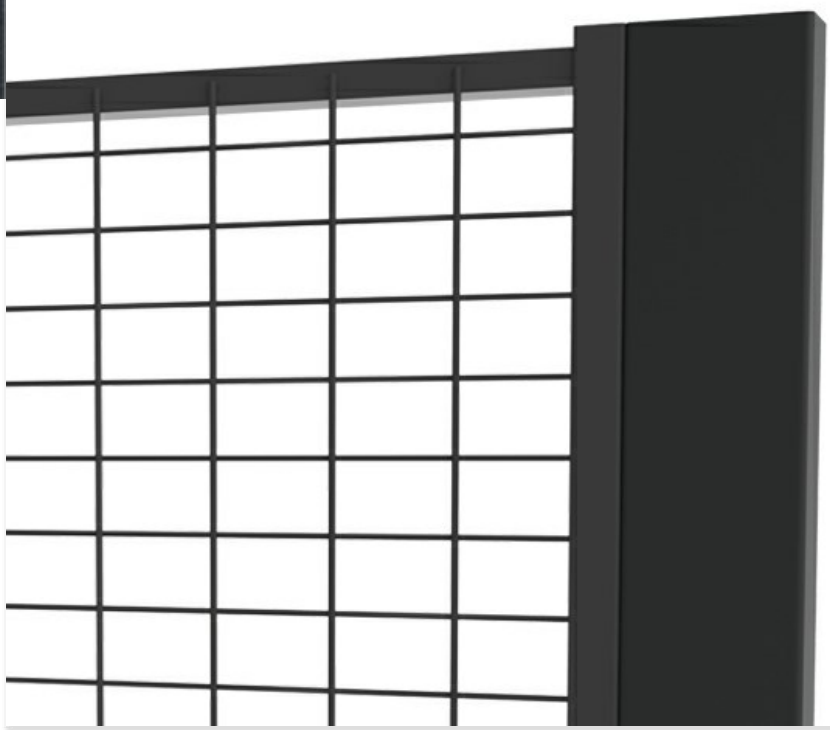
Couvre-joint ajustable

Une tôle de remplissage sert de remplissage lorsqu'un panneau a besoin d'une certaine largeur. Les pièces de remplissage fixes sont disponibles pour toutes les hauteurs et en largeurs de 40 et 70 mm. La pièce de remplissage réglable couvre les espaces entre 40 et 145 mm, offrant ainsi une plus grande flexibilité. L'intervalle de 100 mm entre nos panneaux permet de réduire la découpe des panneaux lorsqu'un espace doit être comblé. La couleur standard est le noir (RAL 9011), mais des couleurs personnalisées sont disponibles sur demande.



The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.




Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.

Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.

Modèles

Fixed infill sheet metal 10 articles

ARTICLES / DESCRIPTION	LARGEUR (MM)	HAUTEUR (MM)
 **T02-3-07504**	40	750
 **T02-3-07507**	70	750
 **T02-3-13004**	40	1300
 **T02-3-13007**	70	1300
 **T02-3-19004**	40	1900
 **T02-3-19007**	70	1900
 **T02-3-22004**	40	2200
 **T02-3-22007**	70	2200
 **T02-3-24004**	40	2400
 **T02-3-24007**	70	2400

Adjustable infill sheet metal 5 articles

ARTICLES / DESCRIPTION	LARGEUR (MM)	HAUTEUR (MM)
 **T05-3-07515** 40-145 mm		750
 **T05-3-13015** 40-145 mm		1300

	**T05-3-19015** 40-145 mm	1900
	**T05-3-22015** 40-145 mm	2200
	**T05-3-24015** 40-145 mm	2400