
Bastaing de protection haut

Le bastaing de protection hautprotège contre les chocs en hauteur. Elle convient parfaitement pour séparer les voies de circulation de véhicules légers ou définir des zones dans un entrepôt.

Nos rails et poteaux antichocs permettent de remplacer les pièces endommagées ou usées au niveau des composants. Cette opération est facilitée grâce à un système d'emboîtement glissant.

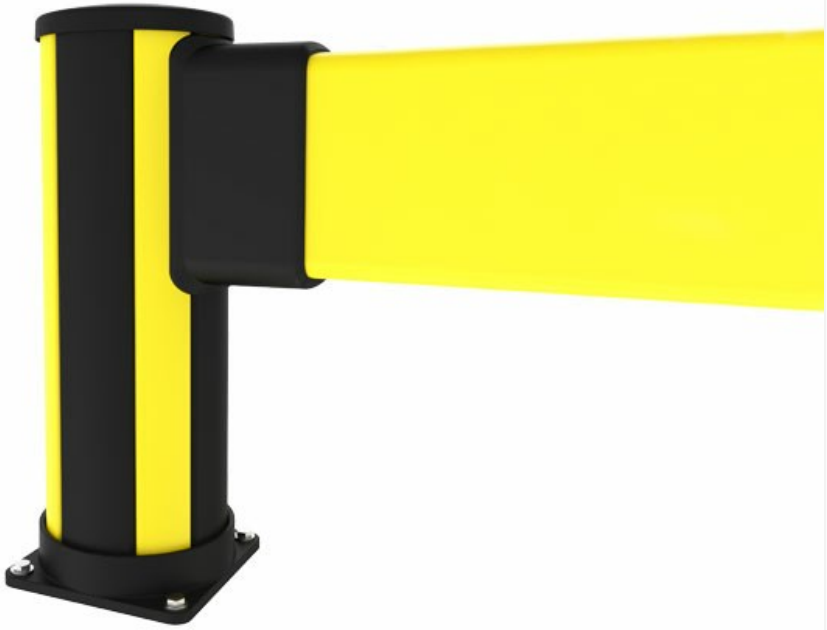

X-Protect est fondé sur une approche unique des barrières de sécurité. Modulaire comme nul autre et doté d'un amortisseur intégré, le système n'est basé que sur quelques composantsqui permettent de constituer un système de protection évolutif. X-Protect permet de transformer, réparer et remplacer rapidement les barrières existantes dans un nombre de configurations sur-mesure illimité.

Impact test results					
Area of impact	*Load*	*Equivalent to*		*90° Deflection*	*Force to fixings*
Centre of barrier C - C as below					
2000mm	6200 J	2500 kg 8 km/h	5000 kg 5.6 km/h	430mm	14.5 kN
2500mm	5500 J	2500 kg 7.5 km/h	5000 kg 5.3 km/h	470mm	12.2 kN
3000mm	5200 J	2500 kg 7.3 km/h	5000 kg 5.1 km/h	520mm	10.4 kN
Posts					
End post	2400 J	2500 kg 4.9 km/h	5000 kg 3.5 km/h	NA *	19.2 kN
Mid post	2400 J	2500 kg 4.9 km/h	5000 kg 3.5 km/h	NA *	18.1 kN

* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

Modèles

Posts 4 articles

ARTICLES / DESCRIPTION	LARGEUR MAX. (MM)	HAUTEUR (MM)	LONGUEUR (MM)	CC (MM)	COULEUR
 **BCC0-061-I100** Fixation angle bastaing haut		610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 **BCM0-061-I100** Fixation intermédiaire bastaing haut		610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 **BCE1-061-I100** Fixation extrémité bastaing haut		610			Zinc Yellow (RAL 1018)
 **BCE0-061-I100** Fixation extrémité bastaing haut		610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

Impact rails 9 articles

ARTICLES / DESCRIPTION	LARGEUR MAX. (MM)	HAUTEUR (MM)	LONGUEUR (MM)	CC (MM)	COULEUR
 **RCI1-027-0050** Traverse bastaing			270	500	Zinc Yellow (RAL 1018)
 **RCI1-047-0070** Traverse bastaing			470	700	Zinc Yellow (RAL 1018)
 **RCI1-067-0090** Impact rail			670	900	Zinc Yellow (RAL 1018)
 **RCI1-077-0100** Traverse bastaing			770	1000	Zinc Yellow (RAL 1018)
 **RCI1-127-0150** Traverse bastaing			1270	1500	Zinc Yellow (RAL 1018)
 **RCI1-177-0200** Traverse bastaing			1770	2000	Zinc Yellow (RAL 1018)
 **RCI1-197-0220** Impact rail			1970	2200	Zinc Yellow (RAL 1018)
 **RCI1-227-0250** Traverse bastaing			2270	2500	Zinc Yellow (RAL 1018)
 **RCI1-277-0300** Traverse bastaing			2770	3000	Zinc Yellow (RAL 1018)

Produits associés



Barrière piétonne avec bastaing haut

La barrière piétonne avec bastaing de protection haut protègent les allées des véhicules de gamme moyenne lorsquele risque de chocs au niveau du sol est réduit. Il est également possible de le comb...

16 articles



X-PROTECT IMPACT PROTECTION

Bastaing de protection

Le bastaing de protection protège contre les chocs au niveau du sol. Elle convient parfaitement pour séparer les voies de circulation de véhicules légers ou définir des zones dans un entrepôt. Nos...

15 articles



X-PROTECT IMPACT PROTECTION

Double bastaing de protection haut

La configuration de double bastaing de protection protège les structures contre les chocs lourds en hauteur. Il s'agit de l'une de nos protections contre les chocs les plus robustes. Nos rails et p...

12 articles



X-PROTECT IMPACT PROTECTION

Double bastaing de protection bas

La configuration du double bastaing de protection bas protège les structures contre les chocs lourds au niveau du sol. Il s'agit de l'une de nos protections contre les chocs les plus robustes,parfa...

12 articles

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"


Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"





X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*


* The highest force depends on the C-C. More information is available upon request.


















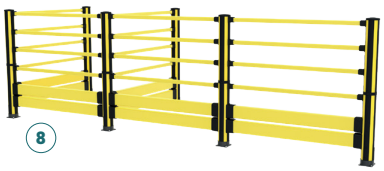

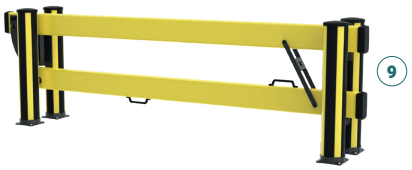





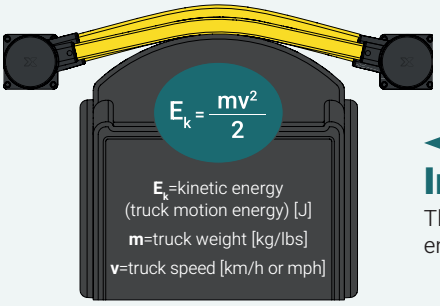


Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C



1. **Bollards**
   - Classic | 5220 J
   - Essential | 1500 J
2. **Impact Barriers**
   - Impact | 4500 J
   - Impact High | 6200 J
   - Double Impact Low | 7700 J
   - Double Impact High | 7000 J
3. **Pedestrian Rails**
   - Pedestrian | 5000 J
   - Essential Pedestrian | 2250 J
   - Essential Pedestrian 2 rail | 1700 J
   - Essential Pedestrian | 2250 J
4. **Floor Barrier** | 2250 J
   - Can be used both with Impact & Pedestrian configurations or as stand-alone protection.
5. **Pedestrian Rails + Impact Barriers**
   - Pedestrian + Impact | 6700 J
   - Pedestrian + Impact High | 8000 J
   - Pedestrian + Double Impact | 8300 J
   - Essential Pedestrian + Impact High | 3100 J
6. **Pedestrian Gate** | 0 J
7. **Column Guard** | 1800 J
8. **Topple Barriers**
   - Pedestrian | 5250 J
   - Impact | 6200 J
9. **Dock Gate** | 10200 J
10. **Height Restrictors**
    - Goal Post | 4200 J
    - Height Guard
11. **Upright Protector**