


Multifunction Column Guard

The Multifunction Column Guard is designed to protect large building columns and pillars from impacts caused by forklifts and other material handling equipment. With asymmetrical on-site adjustment from 250-700mm, it can be tailored to fit various sizes.

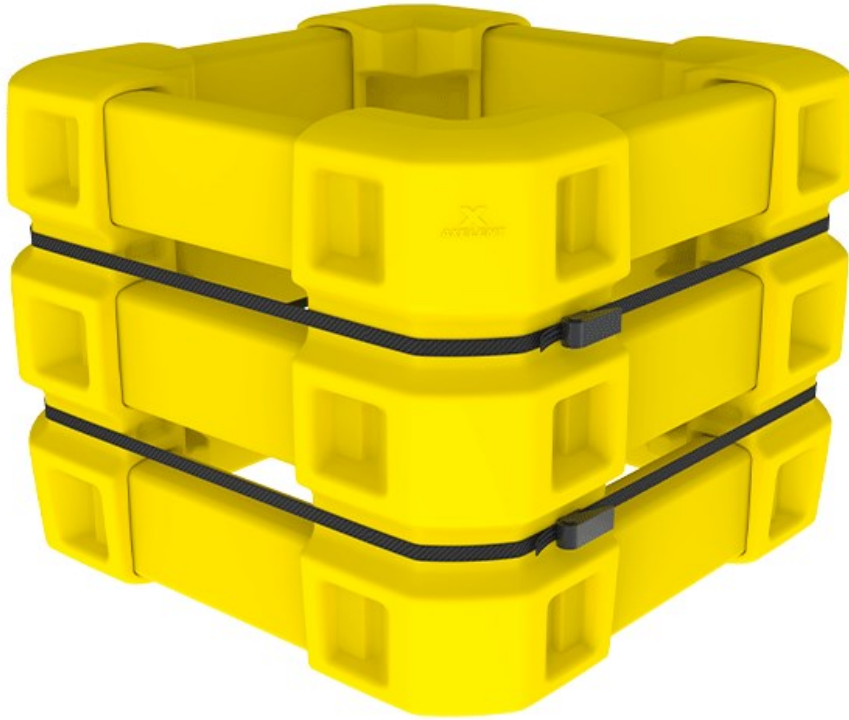

Flexible protection for columns and pillars

The modular design allows for quick installation and easy repairs while ensuring a tight fit to save space. These guards are built to stop vehicles like forklifts, protect columns, and withstand heavy use.

Key Features:

- **Asymmetrical Adjustment:** Accommodates widths from 250mm to 700mm, offering flexibility for various column sizes.
- **Customizable Dimensions:** Easily tailored by cutting the rails that form its sides, providing a precise fit for any environment.
- **Impact Resistance:** Effectively stops vehicles, such as forklifts, eliminating or minimizing damage.
- **Floor Protection:** Shields flooring around columns to maintain structural integrity.
- **Ease of Installation and Repair:** Designed for quick setup and effortless repairs when needed.
- **End-of-Life Sustainability:** Simplified disassembly and material separation for eco-friendly disposal.

Models

ARTICLES / DESCRIPTION		MIN WIDTH (MM)	MAX WIDTH (MM)	HEIGHT (MM)	COLOR
	CCP1-025	250	731	910	Zinc Yellow (RAL 1018)
	CCP1-025-0030	250	778	910	Zinc Yellow (RAL 1018)
	CCP1-025-0070	300	1178	910	Zinc Yellow (RAL 1018)

Related products



COLUMN GUARDS

Large Column Guard

Axelent offer a larger column guard for the most flexible protection for larger columns. This guard is suitable for 400mm square columns as standard. There are also infills available to extend the...

3 articles

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides

Height:

350 -

Width:

200 mm

7 7/8"

1160 mm

13 13/16" -

45 11/16"



Essential
2 connection sides

Height:

620 -

Width:

132 mm

5 3/16"

1170 mm

24 7/16" -






46 1/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

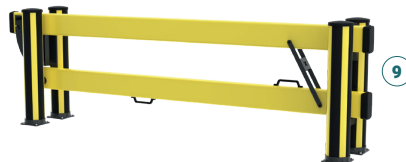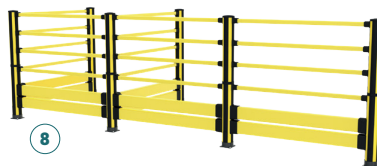

Component Colours





RAL 1018



RAL 9011

Operating temperature

-10°C → 40°C

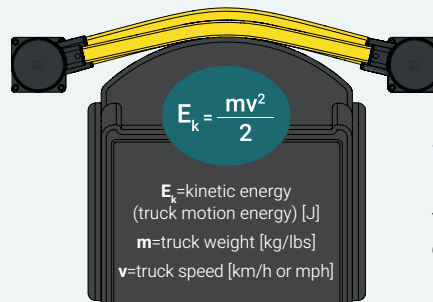

$$E_k = \frac{mv^2}{2}$$

E_k = kinetic energy (truck motion energy) [J]

m = truck weight [kg/lbs]

v = truck speed [km/h or mph]

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight

3600 kg / 7930 lbs



Loaded weight

2700 kg / 5940 lbs



Loaded weight

2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J

Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

1. Bollards

- Classic | 5220 J
- Essential | 1500 J

2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

6. Pedestrian Gate | 0 J

7. Column Guard | 1800 J

8. Toppler Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

9. Dock Gate | 10200 J

10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

11. Upright Protector