

Large Column Guard

Axelent offer a larger column guard for the most flexible protection for larger columns. This guard is suitable for 400mm square columns as standard. There are also infills available to extend the protection up to 1000mm square. The column guard is manufactured in low density polyethylene to give high flexibility and strength.



Models

ARTICLES / DESCRIPTION		WIDTH (MM)	HEIGHT (MM)
	AG-CP4-110IN Infill, RAL 1003	110	
	AG-CP4-250IN Infill, RAL 1003	250	
	AG-CP400 RAL 1003	200	1080

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Height:

350 -

Width:

1160 mm

200 mm

13 13/16" -

7 7/8"

45 11/16"



Essential

2 connection sides

Height:

620 -

Width:

1170 mm

132 mm

5 3/16"






24 7/16" -

46 1/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

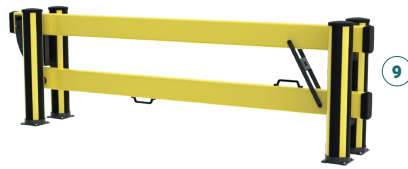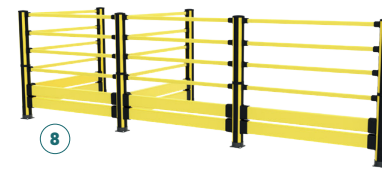

Component Colours





RAL 1018



RAL 9011

Operating temperature

-10°C → 40°C

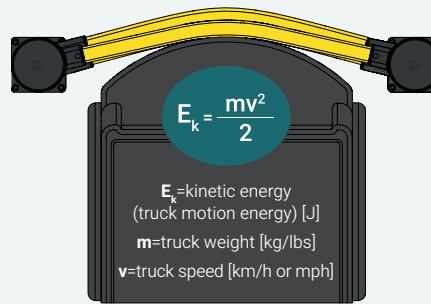

$$E_k = \frac{mv^2}{2}$$

E_k = kinetic energy (truck motion energy) [J]

m = truck weight [kg/lbs]

v = truck speed [km/h or mph]

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight

3600 kg / 7930 lbs



Loaded weight

2700 kg / 5940 lbs



Loaded weight

2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J

Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

1. Bollards

- Classic | 5220 J
- Essential | 1500 J

2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

6. Pedestrian Gate | 0 J

7. Column Guard | 1800 J

8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

9. Dock Gate | 10200 J

10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

11. Upright Protector