


Barriera di impatto alta

Utilizzare la Barriera di impatto alta per una protezione dagli impatti di alto livello. È la soluzione ideale per separare veicoli leggeri o definire zone del magazzino.

Le nostre guide modulari e i dissuasori consentono di sostituire le parti danneggiate o usurate a livello di componente. Se è necessario sostituire qualsiasi componente, basta un semplice passaggio.

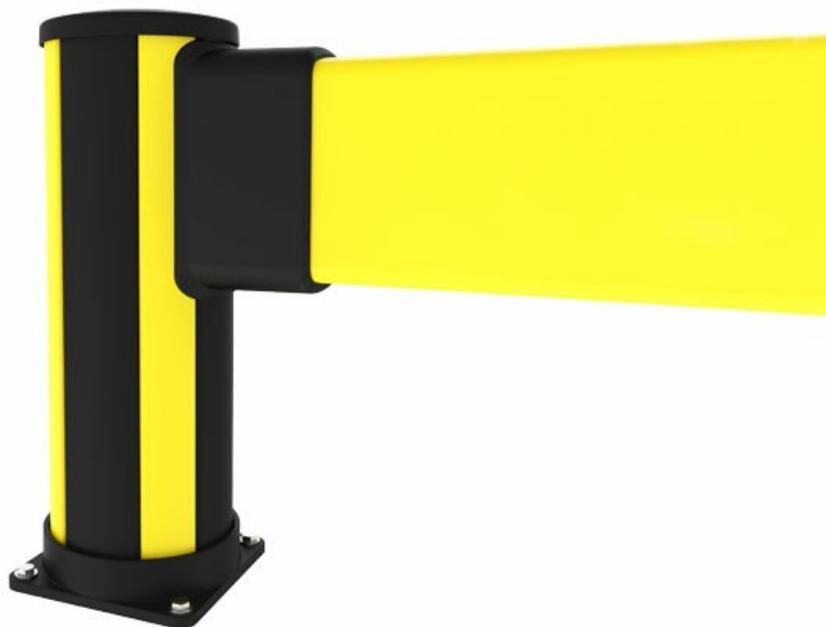

X-Protect è un approccio unico alle barriere di sicurezza. Modularità senza pari utilizzando solo pochi componenti di sistema e lo smorzamento integrato per creare un sistema a barriera che si adatta al posto di lavoro. X-Protect consente attività rapide di trasformazione, riparazione o sostituzione delle barriere esistenti e le configurazioni su misura sono illimitate.

Impact test results					
<i>Area of impact</i>	<i>Load</i>	<i>Equivalent to</i>		<i>90° Deflection</i>	<i>Force to fixings</i>
Centre of barrier C - C as below					
2000mm	6200 J	2500 kg 8 km/h	5000 kg 5.6 km/h	430mm	14.5 kN
2500mm	5500 J	2500 kg 7.5 km/h	5000 kg 5.3 km/h	470mm	12.2 kN
3000mm	5200 J	2500 kg 7.3 km/h	5000 kg 5.1 km/h	520mm	10.4 kN
Posts					
End post	2400 J	2500 kg 4.9 km/h	5000 kg 3.5 km/h	NA *	19.2 kN
Mid post	2400 J	2500 kg 4.9 km/h	5000 kg 3.5 km/h	NA *	18.1 kN

* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

Modelli

Posts 6 articoli

ARTICOLI / DESCRIZIONE	ALTEZZA (MM)	LUNGHEZZA (MM)	CC (MM)	COLORE
 BCC1-061-I100 Impact High corner	610			Zinc Yellow (RAL 1018)
 BCC0-061-I100 Impact High corner	610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCM1-061-I100 Impact High mid	610			Zinc Yellow (RAL 1018)
 BCM0-061-I100 Impact High mid	610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCE1-061-I100 Impact High end	610			Zinc Yellow (RAL 1018)
 BCE0-061-I100 Impact High end	610			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

Impact rails 9 articoli

ARTICOLI / DESCRIZIONE	ALTEZZA (MM)	LUNGHEZZA (MM)	CC (MM)	COLORE
 RCI1-277-0300 Impact rail		2770	3000	Zinc Yellow (RAL 1018)
 RCI1-227-0250 Impact rail		2270	2500	Zinc Yellow (RAL 1018)
 RCI1-177-0200 Impact rail		1770	2000	Zinc Yellow (RAL 1018)

	RCI1-127-0150 Impact rail	1270	1500	Zinc Yellow (RAL 1018)
	RCI1-077-0100 Impact rail	770	1000	Zinc Yellow (RAL 1018)
	RCI1-047-0070 Impact rail	470	700	Zinc Yellow (RAL 1018)
	RCI1-027-0050 Impact rail	270	500	Zinc Yellow (RAL 1018)
	RCI1-067-0090 Impact rail	670	900	Zinc Yellow (RAL 1018)
	RCI1-197-0220 Impact rail	1970	2200	Zinc Yellow (RAL 1018)

Prodotti correlati

X-PROTECT IMPACT PROTECTION

Barriera di impatto



Utilizzare la Barriera di impatto per la protezione dagli impatti a livello del suolo. È la soluzione ideale per separare veicoli leggeri o definire zone del magazzino. Le nostre guide modulari e i...

15 articoli

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Width:

200 mm

7 7/8"

Height:

350 -

1160 mm

13 13/16" -

45 11/16"



Essential

2 connection sides

Width:

132 mm

5 3/16"

Height:

620 -

1170 mm

24 7/16" -

46 1/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.



1 5250 J




2 4500 J



3 6200 J



4 7700 J

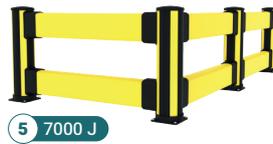


5 7000 J



6 5000 J



7 6700 J



8 8000 J



9 8300 J



10 0 J



11 1800 J



12 3000 J



13 1500 J



14 1700 J




15 2250 J



16 3100 J

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

* The Floor Barrier can be used in combination with configurations: 3, 6, 8 & 9

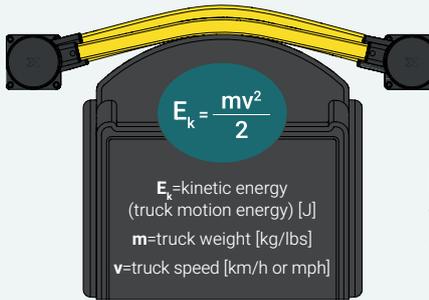

Impact testing

This is how we calculate the energy from a vehicle impact.



Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J



Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J



Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C

