


Barriera pedonale con impatto alto

Utilizzare la configurazione della Barriera pedonale + Barriera di impatto alta per proteggere le passerelle dai veicoli di medie dimensioni in cui vi sia un rischio ridotto di impatti a livello del suolo.

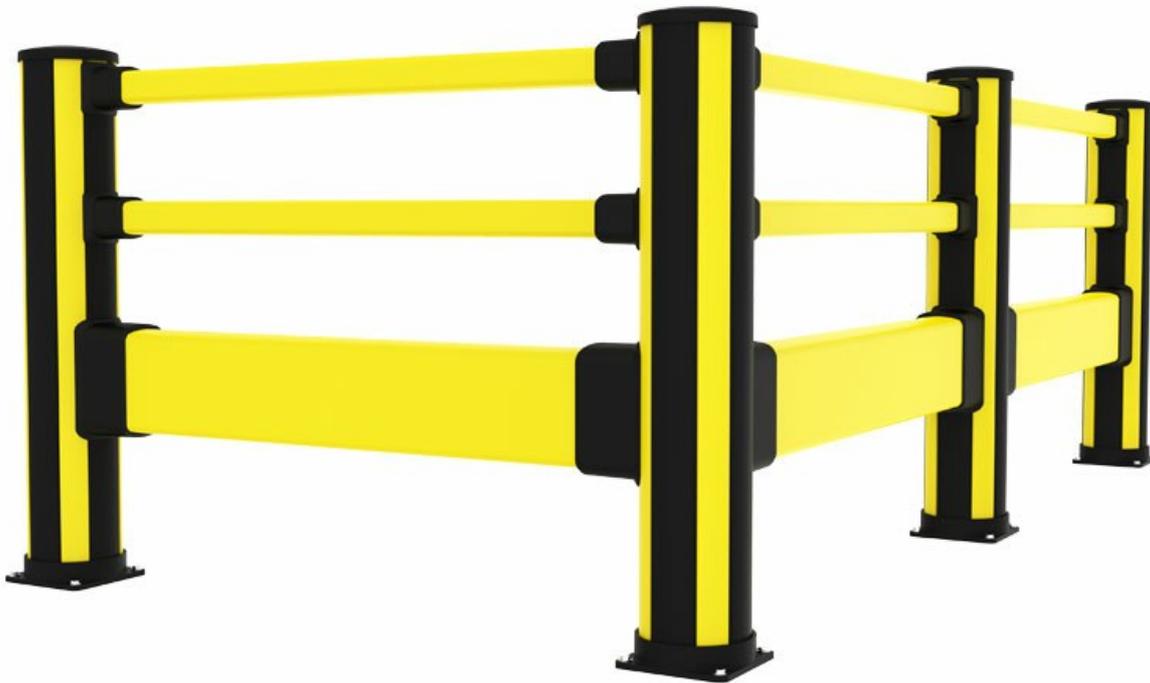

X-Protect è un approccio unico alle barriere di sicurezza. Modularità senza pari utilizzando solo pochi componenti di sistema e lo smorzamento integrato per creare un sistema a barriera che si adatta al posto di lavoro. X-Protect consente attività rapide di trasformazione, riparazione o sostituzione delle barriere esistenti e le configurazioni su misura sono illimitate.

Impact test results					
Area of impact	Load	Equivalent to		90° Deflection	Force to fixings
Centre of barrier C - C as below					
2000mm	8000 J	2500 kg 9.1 km/h	5000 kg 6.4 km/h	450mm	17 kN
Posts					
End post	1850 J	2500 kg 4.3 km/h	5000 kg 3 km/h	NA *	11.6 kN
Mid post	2450 J	2500 kg 5 km/h	5000 kg 3.5 km/h	NA *	12.7 kN

* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

Modelli

Posts 6 articoli

ARTICOLI / DESCRIZIONE	ALTEZZA (MM)	LUNGHEZZA (MM)	CC (MM)	COLORE
 BCC1-116-I1P2 Pedestrian + Impact High corner	1160			Zinc Yellow (RAL 1018)
 BCC0-116-I1P2 Pedestrian + Impact High corner	1160			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCM1-116-I1P2 Pedestrian + Impact High mid	1160			Zinc Yellow (RAL 1018)
 BCM0-116-I1P2 Pedestrian + Impact High mid	1160			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCE1-116-I1P2 Pedestrian + Impact High end	1160			Zinc Yellow (RAL 1018)
 BCE0-116-I1P2 Pedestrian + Impact High end	1160			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

Impact rails 7 articoli

ARTICOLI / DESCRIZIONE	ALTEZZA (MM)	LUNGHEZZA (MM)	CC (MM)	COLORE
 RCI1-027-0050 Impact rail		270	500	Zinc Yellow (RAL 1018)
 RCI1-277-0300 Impact rail		2770	3000	Zinc Yellow (RAL 1018)
 RCI1-227-0250 Impact rail		2270	2500	Zinc Yellow (RAL 1018)
 RCI1-177-0200 Impact rail		1770	2000	Zinc Yellow (RAL 1018)
 RCI1-127-0150 Impact rail		1270	1500	Zinc Yellow (RAL 1018)
 RCI1-077-0100 Impact rail		770	1000	Zinc Yellow (RAL 1018)
 RCI1-047-0070 Impact rail		470	700	Zinc Yellow (RAL 1018)

Hand rails 5 articoli

ARTICOLI / DESCRIZIONE	ALTEZZA (MM)	LUNGHEZZA (MM)	CC (MM)	COLORE
 RCP1-027-0050 Hand rail		270	500	Zinc Yellow (RAL 1018)
 RCP1-047-0070 Hand rail		470	700	Zinc Yellow (RAL 1018)
 RCP1-077-0100 Hand rail		770	1000	Zinc Yellow (RAL 1018)
 RCP1-127-0150 Hand rail		1270	1500	Zinc Yellow (RAL 1018)
 RCP1-177-0200 Hand rail		1770	2000	Zinc Yellow (RAL 1018)

Gate 1 articoli

ARTICOLI / DESCRIZIONE	ALTEZZA (MM)	LUNGHEZZA (MM)	CC (MM)	COLORE
 GCP8-069-0121 Pedestrian gate, 690-1210 mm				

Prodotti correlati



Barriera pedonale con impatto

Utilizzare la configurazione della Barriera pedonale + Barriera di impatto per proteggere le passerelle dai veicoli di medie dimensioni in cui vi sia un rischio maggiore di impatti a livello del su...

19 articoli



X-PROTECT PEDESTRIAN

Cannello pedonale

Universale, con chiusura automatica e larghezza regolabile tra 690 mm e 1210 mm.

1 articoli

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Width:

200 mm

7 7/8"

Height:

350 -

1160 mm

13 13/16" -

45 11/16"



Essential

2 connection sides

Width:

132 mm

5 3/16"

Height:

620 -

1170 mm

24 7/16" -

46 1/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.



1 5250 J




2 4500 J



3 6200 J



4 7700 J

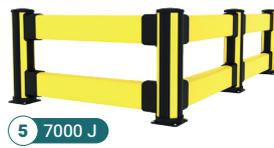


5 7000 J



6 5000 J



7 6700 J

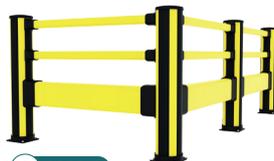

8 8000 J



9 8300 J



10 0 J



11 1800 J



12 3000 J



13 1500 J



14 1700 J




15 2250 J



16 3100 J

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

* The Floor Barrier can be used in combination with configurations: 3, 6, 8 & 9

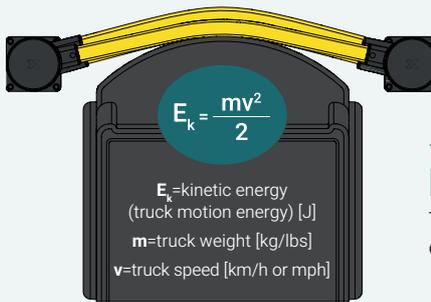

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs



Loaded weight
2700 kg / 5940 lbs



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J

Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C

