


固定 / 調節式インフィルシート トメタル

インフィルシートメタルは、ガードに一定の幅が必要な場合の隙間を埋めます。固定式インフィルは、すべての高さに対応し、幅は40 mmと70 mmをご用意しています。調節式インフィルは、40 mmから145 mmの隙間をカバーし、より高い柔軟性を提供します。Axelentのパネル間の間隔は100 mmであり、ランダムな隙間を埋めるためにパネルをカットする手間を削減します。標準カラーはブラック(RAL 9011)です。ご要望に応じてカスタムカラーも承ります。



The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.

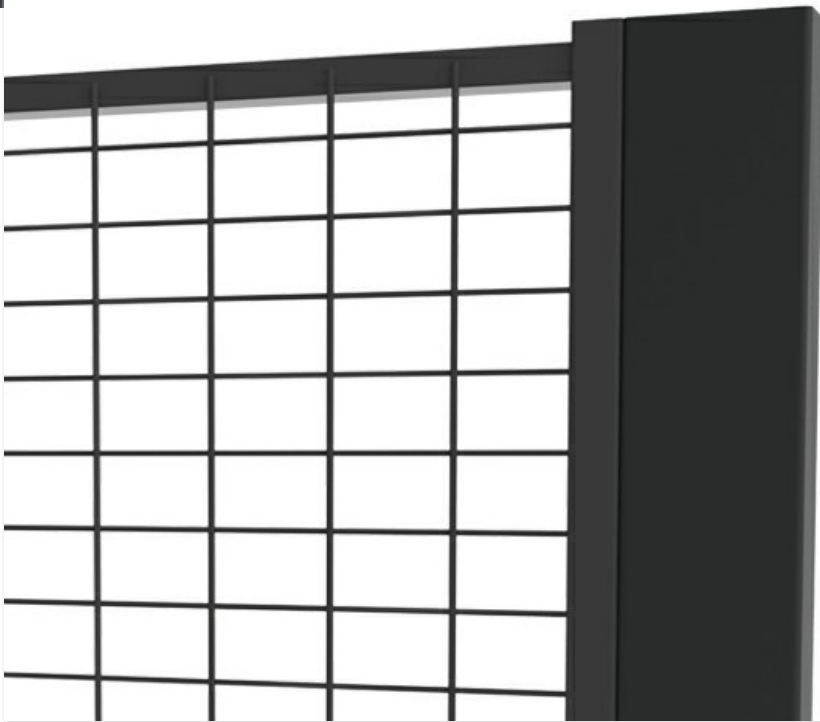









Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.



Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.


モデル

固定インフィルシートメタル 10 品目

品目 / 本製品について	幅 (MM)	高さ (MM)
 T02-3-07504	40	750
 T02-3-07507	70	750
 T02-3-13004	40	1300
 T02-3-13007	70	1300
 T02-3-19004	40	1900
 T02-3-19007	70	1900
 T02-3-22004	40	2200
 T02-3-22007	70	2200
 T02-3-24004	40	2400
 T02-3-24007	70	2400


調節式インフィルシートメタル 5 品目

品目 / 本製品について	幅 (MM)	高さ (MM)
 T05-3-07515 40-145 mm		750
 T05-3-13015 40-145 mm		1300




T05-3-19015
40-145 mm

1900



T05-3-22015
40-145 mm

2200



T05-3-24015
40-145 mm

2400