

インパクトバリア

低い位置の衝撃保護にはX-Protectインパクトバリアをご使用ください。軽量車両の分離や倉庫のゾーン定義に最適です。

当社のモジュラー式レールとボラードにより、損傷または古くなったパーツを部品ごとに交換できます。取り外し・取り付けはスライドするだけで簡単です。



X-Protectは、衝突防止のバリアとして、また倉庫エリアの仕切りとして使用できる多機能なフォークリフトガードです。倉庫や工場の安全性を、最大限に高めることができます。

優れたモジュール性、少ないシステム構成部品によるシンプルなつくりにより、現場のニーズに合わせて自在にカスタマイズができるユニークな安全バリアです。既存バリアの変更や修理交換も簡単です。

衝突試験結果					
衝突位置	衝撃エネルギー	相当荷重		90° 変異	固定部への力
バリア中央 C - C					
2000mm	4500 J	2500 kg 6.8 km/h	5000 kg 4.8 km/h	350mm	4kN
2500mm	4200 J	2500 kg 6.5 km/h	5000 kg 4.6 km/h	390mm	6.6 kN
3000mm	3900 J	2500 kg 6.3 km/h	5000 kg 4.4 km/h	420mm	9.8 kN
ポスト					
End post	4500 J	2500 kg 6.8 km/h	5000 kg 4.4 km/h	NA *	11.8 kN
Mid post	4500 J	2500 kg 6.8 km/h	5000 kg 4.8 km/h	NA *	13.6 kN

* ポストの変位はレールの変位と同等またはそれ以下であり、製品選定において重要とは見なされません。性能は最下段のレールの高さで試験されています。ポストは、より低い位置での衝突に対してはより良い性能を示し、変位も少なくなります。

モデル

Bollard 6 品目

品目 / 本製品について	高さ (MM)	長さ (MM)	CC (MM)	色
 BCM1-035-I100 インパクトミドル	350			Zinc Yellow (RAL 1018)
 BCM0-035-I100 インパクトミドル	350			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCE1-035-I100 インパクトエンド	350			Zinc Yellow (RAL 1018)
 BCE0-035-I100 インパクトエンド	350			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCC1-035-I100 インパクトコーナー	350			Zinc Yellow (RAL 1018)
 BCC0-035-I100 インパクトコーナー	350			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

Impact rails 9 品目

品目 / 本製品について	高さ (MM)	長さ (MM)	CC (MM)	色
 RCI1-277-0300 インパクトレール		2770	3000	Zinc Yellow (RAL 1018)
 RCI1-227-0250 インパクトレール		2270	2500	Zinc Yellow (RAL 1018)
 RCI1-177-0200 インパクトレール		1770	2000	Zinc Yellow (RAL 1018)
 RCI1-127-0150 インパクトレール		1270	1500	Zinc Yellow (RAL 1018)
 RCI1-077-0100 インパクトレール		770	1000	Zinc Yellow (RAL 1018)
 RCI1-047-0070 インパクトレール		470	700	Zinc Yellow (RAL 1018)
 RCI1-027-0050 インパクトレール		270	500	Zinc Yellow (RAL 1018)
 RCI1-067-0090 Impact rail		670	900	Zinc Yellow (RAL 1018)
 RCI1-197-0220 Impact rail		1970	2200	Zinc Yellow (RAL 1018)

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
 4 connection sides
 Width:
 200 mm
 7 7/8"

Height:
 350 -
 1160 mm
 13 13/16" -
 45 11/16"





Essential
 2 connection sides
 Width:
 132 mm
 5 3/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

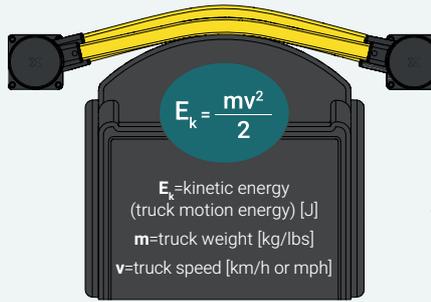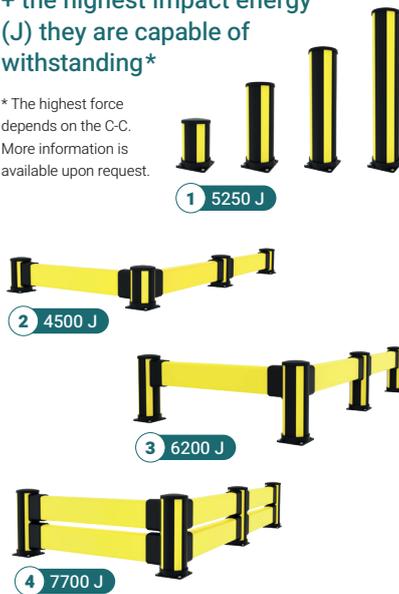

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs



Loaded weight
2700 kg / 5940 lbs



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J





Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C

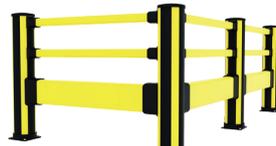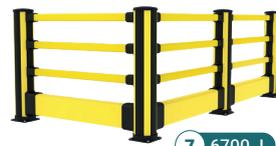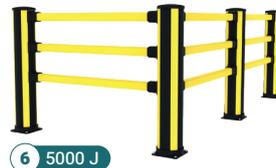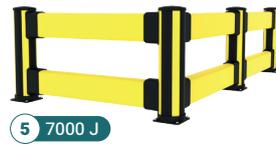

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

* The Floor Barrier can be used in combination with configurations: **3, 6, 8 & 9**