


Pedestrian Barrier

Use the X-Protect Pedestrian Barrier configuration to define pedestrian routes and protect from light duty impacts. It is also possible to combine with a pedestrian gate. The pedestrian gate is self closing, provided with a universal handle and width is adjustable from 690-1210 mm.



X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

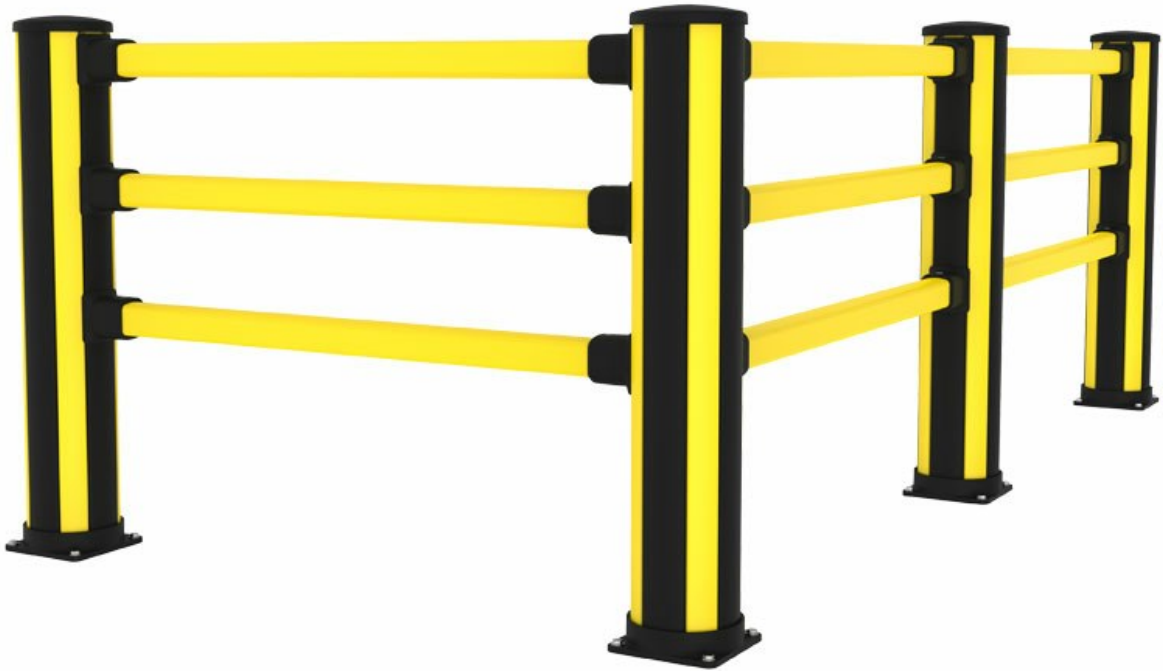


Impact test results					
<i>Area of impact</i>	<i>Load</i>	<i>Equivalent to</i>		<i>90° Deflection</i>	<i>Force to fixings</i>
Centre of barrier C - C as below					
1500mm	4000 J	2500 kg 6.4 km/h	5000 kg 4.5 km/h	360mm	14.3 kN
2000mm	5000 J	2500 kg 7.2 km/h	5000 kg 5 km/h	490mm	18.7 kN
Posts					
End post	1900 J	2500 kg 4.4 km/h	5000 kg 3.1 km/h	NA *	10 kN
Mid post	1900 J	2500 kg 4.4 km/h	5000 kg 3.1 km/h	NA *	8.4 kN

* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and






deflection.

Models

Posts 3 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 BCC0-116-00P3 Pedestrian corner	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCM0-116-00P3 Pedestrian mid	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 BCE0-116-00P3 Pedestrian end	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

Hand rails 5 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 RCP1-027-0050 Hand rail		500	Zinc Yellow (RAL 1018)
 RCP1-047-0070 Hand rail		700	Zinc Yellow (RAL 1018)
 RCP1-077-0100 Hand rail		1000	Zinc Yellow (RAL 1018)
 RCP1-127-0150 Hand rail extrusion, C-C=1500mm, RAL 1018 yellow		1500	Zinc Yellow (RAL 1018)
 RCP1-177-0200 Hand rail extrusion		2000	Zinc Yellow (RAL 1018)

Gate 1 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 GCP8-069-0121			

Related products



CLASSIC PEDESTRIAN

Pedestrian Barrier with Impact High

Use the X-Protect Pedestrian Barrier with Impact High configuration to protect walkways from medium duty vehicles where there is a reduced risk of ground level impacts. It is also possible to combi...

16 articles



CLASSIC PEDESTRIAN

Pedestrian Barrier with Impact

Use the X-Protect Pedestrian Barrier with Impact configuration to protect walkways from medium duty vehicles where there is an increased risk of ground level impacts. It is also possible to combine...

16 articles



X-PROTECT PEDESTRIAN

Pedestrian gate

Universally handed, self closing and width adjustable from 690mm to 1210 mm.

1 articles

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS

Classic
4 connection sides

Height: 350 – 1160 mm
Width: 200 mm | 13 13/16" – 7 7/8" | 45 11/16"

Essential
2 connection sides

Height: 620 – 1170 mm
Width: 132 mm | 24 7/16" – 5 3/16" | 46 1/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.



Impact testing

This is how we calculate the energy from a vehicle impact.

Loaded weight
3600 kg / 7930 lbs

Loaded weight
2700 kg / 5940 lbs

Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J

Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C



1. Bollards

- Classic | 5220 J
- Essential | 1500 J

2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

6. Pedestrian Gate | 0 J

7. Column Guard | 1800 J

8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

9. Dock Gate | 10200 J

10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

11. Upright Protector