

X-Protect Protection de pilier

Pour protéger les piliers de votre installation contre les chocs et les préserver des dommages. De conception unique, la protection est pourvue de cavités spécialement formées pour efficacement dissiper les forces d'impact.

Les sections à emboîtement sont modulaires, ce qui facilite l'installation de la protection et garantit un ajustement serré tout autour de la colonne pour un gain d'espace. Pour parachever l'installation, des sangles réglables viennent maintenir la protection en place.



X-Protect est fondé sur une approche unique des barrières de sécurité. Modulaire comme nul autre et doté d'un amortisseur intégré, le système n'est basé que sur quelques composants qui permettent de constituer un système de protection évolutif. X-Protect permet de transformer, réparer et remplacer rapidement les barrières existantes dans un nombre de configurations sur-mesure illimité.

Modeller

ARTIKELN / BESCHREIBUNG

HÉICHT (MM)

FAARF



CCP1-015-0038

Pour des colonnes de 150 à 375 mm

900

Zinc Yellow (RAL 1018)

Zesammenhang Produiten



X-PROTECT PROTECTION CONTRE LES IMPACTS

Bastaing de protection

Utilisez la barrière d'impact X-Protect pour la protection contre les impacts au niveau du sol. Elle est idéale pour séparer les véhicules légers ou définir des zones d'entrepôt. Nos rails modulaires...

[12 artikelen](#)



PÉDISTE CLASSIQUE

Barrière piétonne

Utilisez la configuration de la barrière piétonne X-Protect pour définir des itinéraires piétonniers et protéger contre les impacts légers. Il est également possible de le combiner avec une porte p...

[9 artikelen](#)



X-PROTECT BOLLARDS

Poteaux antichocs

Les Poteaux antichocs protègent les coins, les portes et les équipements des impacts de véhicules. Le schéma de couleurs noir et jaune améliore la visibilité et aide à diriger le trafic de chariots...

[7 artikelen](#)



X-PROTECT X-GUARD BOLLARDS

Poteaux antichocs et adaptateur X-Guard

Utilisez nos poteaux X-Protect pour protéger les entrées de porte, les angles à nu et les machines. De plus, les couleurs noires et jaunes des poteaux attirent l'attention du conducteur du chariot...

[6 artikelen](#)

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Height:

350 -

Width:

200 mm

7 7/8"

1160 mm

13 13/16" -

45 11/16"



Essential

2 connection sides

Height:

620 -

Width:

132 mm

5 3/16"

1170 mm

24 7/16" -







46 1/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

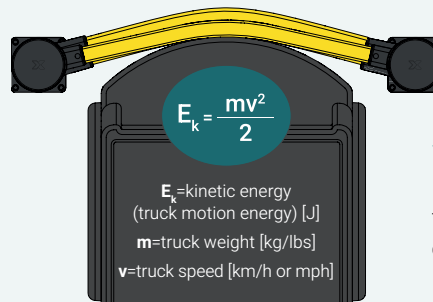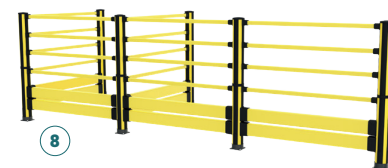

$$E_k = \frac{mv^2}{2}$$

E_k = kinetic energy (truck motion energy) [J]

m = truck weight [kg/lbs]

v = truck speed [km/h or mph]

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight

3600 kg / 7930 lbs



Loaded weight

2700 kg / 5940 lbs



Loaded weight

2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J

Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours




RAL 1018



RAL 9011

Operating temperature

-10°C → 40°C



1. Bollards

- Classic | 5220 J
- Essential | 1500 J

2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

6. Pedestrian Gate | 0 J

7. Column Guard | 1800 J

8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

9. Dock Gate | 10200 J

10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

11. Upright Protector