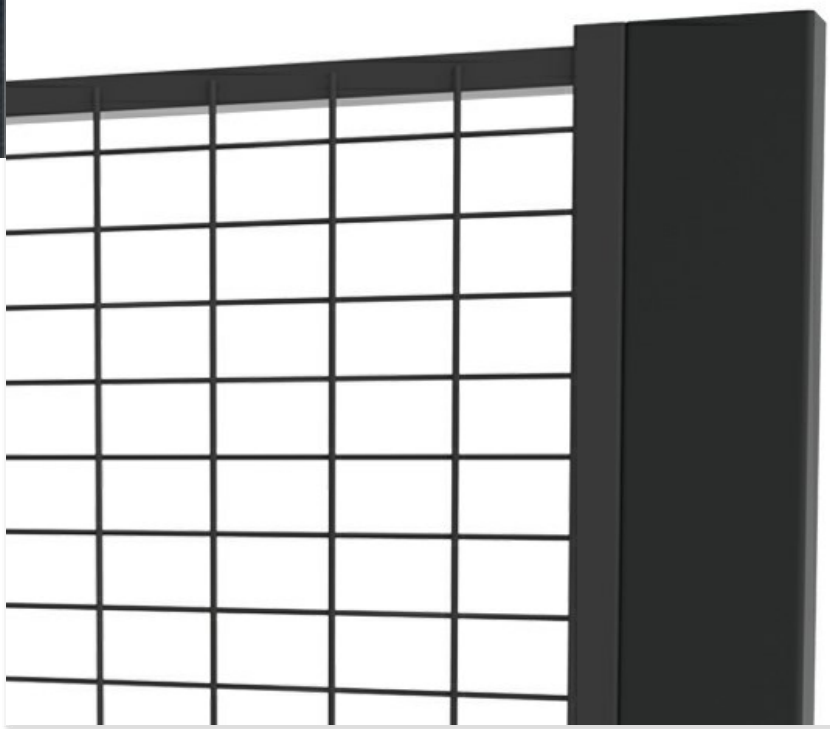
Vulplaat

Een vulplaat wordt gebruikt in gevallen waar de afscherming van een bepaalde breedte dient te zijn. Vulplaten zijn leverbaar in alle hoogtes en in twee breedtes. 40 en 70 mm. De standaard kleur is zwart (RAL 9011), maar de vulplaat kan geleverd worden in iedere gewenste kleur.



The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.




Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.

Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.

Modellen

Vaste montage bit 10 artikelen

	ARTIKELEN / OMSCHRIJVING	BREEDTE (MM)	HOOGTE (MM)
	**T02-3-07504**	40	750
	**T02-3-07507**	70	750
	**T02-3-13004**	40	1300
	**T02-3-13007**	70	1300
	**T02-3-19004**	40	1900
	**T02-3-19007**	70	1900
	**T02-3-22004**	40	2200
	**T02-3-22007**	70	2200
	**T02-3-24004**	40	2400
	**T02-3-24007**	70	2400

Verstelbare montage bit 5 artikelen

	ARTIKELEN / OMSCHRIJVING	BREEDTE (MM)	HOOGTE (MM)
	**T05-3-07515** 40-145 mm		750
	**T05-3-13015** 40-145 mm		1300

	**T05-3-19015** 40-145 mm	1900
	**T05-3-22015** 40-145 mm	2200
	**T05-3-24015** 40-145 mm	2400