


Double impact

Gebruik de Double Impact barrier-configuratie om constructies te beschermen tegen zware schokken van hoog niveau. Het is een van onze sterkste schokbeschermingsconfiguraties.

Met onze modulaire rails en bolders kunnen beschadigde of versleten onderdelen op componentniveau worden vervangen. Als u een onderdeel moet vervangen, is dat slechts een glijbaan verwijderd.

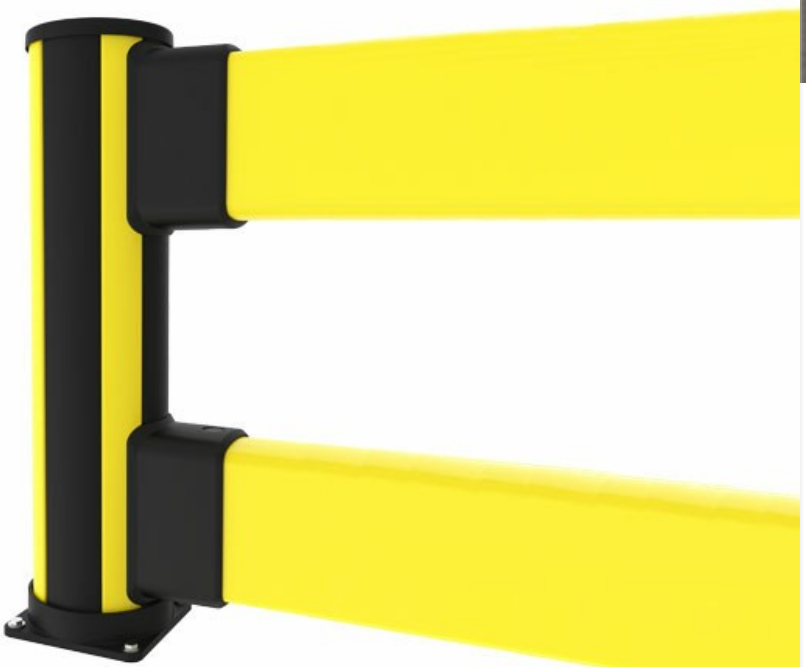

X-Protect is een unieke benadering van aanrijdbeveiligingen. Ongeëvenaarde modulariteit, met gebruik van slechts enkele systeemcomponenten en ingebouwde demping om een barrièresysteem te creëren dat verandert met uw werkplek. X-Protect maakt een snelle transformatie, reparatie of vervanging van bestaande barrières mogelijk en op maat gemaakte configuraties zijn grenzeloos.

Impact test results					
Area of impact	*Load*	*Equivalent of*		*90° Deflection*	*Force to fixings*
Centre of barrier C - C as below					
2000mm	7000 J	2500 kg 8.5 km/h	5000 kg 6 km/h	345 mm	12.4 kN
2500mm	6500 J	2500 kg 8.2 km/h	5000 kg 5.8 km/h	359 mm	11.4 kN
3000mm	6200 J	2500 kg 8 km/h	5000 kg 5.8 km/h	409 mm	10.7 kN
Posts					
End post	6100 J	2500 kg 7.9 km/h	5000 kg 5.6 km/h	NA*	15.5 kN
Mid post	6100 J	2500 kg 7.9 km/h	5000 g 5.6 km/h	NA*	12.4 kN

* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection will be reduced.


Modellen

Palen 3 artikelen

ARTIKELEN / OMSCHRIJVING		HOOGTE (MM)	LENGTE (MM)	CC (MM)	KLEUR
	**BCE0-087-I200** Double Impact end	870			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
	**BCM0-087-I200** Double Impact mid	870			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
	**BCC0-087-I200** Double Impact corner	870			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

Impact rails 9 artikelen

ARTIKELEN / OMSCHRIJVING		HOOGTE (MM)	LENGTE (MM)	CC (MM)	KLEUR
	**RCI1-027-0050** Impact rail		270	500	Zinc Yellow (RAL 1018)
	**RCI1-047-0070** Impact rail		470	700	Zinc Yellow (RAL 1018)

	**RCI1-067-0090** Impact rail	670	900	Zinc Yellow (RAL 1018)
	**RCI1-077-0100** Impact rail	770	1000	
	**RCI1-127-0150** Impact rail	1270	1500	Zinc Yellow (RAL 1018)
	**RCI1-177-0200**	1770	2000	Zinc Yellow (RAL 1018)
	**RCI1-197-0220** Impact rail	1970	2200	Zinc Yellow (RAL 1018)
	**RCI1-227-0250** Impact rail	2270	2500	Zinc Yellow (RAL 1018)
	**RCI1-277-0300** Impact rail	2770	3000	Zinc Yellow (RAL 1018)

Gerelateerde producten



X-PROTECT IMPACT PROTECTION

Impact

Gebruik de X-Protect Impact voor aanrijdbeveiliging op grondniveau. Het is ideaal voor het scheiden van lichte voertuigen of het afbakenen van magazijnzones.Met onze modulaire rails en bolders kunn...

15 artikelen



X-PROTECT IMPACT PROTECTION

Impact High

Gebruik de Impact High voor hoogwaardige aanrijdbeveiliging. Het is ideaal voor het scheiden van lichte voertuigen of het afbakenen van magazijnzones.Met onze modulaire rails en bolders kunnen besc...

13 artikelen



X-PROTECT IMPACT PROTECTION

Double impact low

Gebruik de Double Impact Low barrier om constructies te beschermen tegen zware schokken op grondniveau. Het is een van onze sterkste schokbeschermingsconfiguraties en ook ideaal voor het bescherme...

12 artikelen



Pedestrian Barrier met Impact

Gebruik de configuratie Pedestrian Barrier met Impact barrier om looppaden te beschermen tegen middelzware voertuigen waar er een verhoogd risico is op botsingen op grondniveau. Ook te combineren m...

16 artikelen

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"


Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"





X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*


* The highest force depends on the C-C. More information is available upon request.


















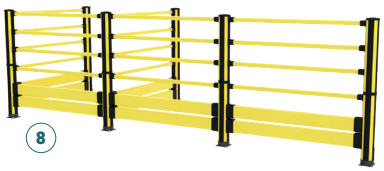

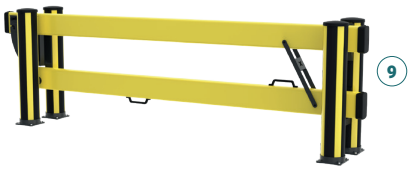





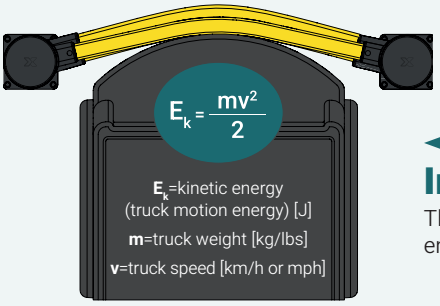


Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C



1. **Bollards**
   - Classic | 5220 J
   - Essential | 1500 J
2. **Impact Barriers**
   - Impact | 4500 J
   - Impact High | 6200 J
   - Double Impact Low | 7700 J
   - Double Impact High | 7000 J
3. **Pedestrian Rails**
   - Pedestrian | 5000 J
   - Essential Pedestrian | 2250 J
   - Essential Pedestrian 2 rail | 1700 J
   - Essential Pedestrian | 2250 J
4. **Floor Barrier** | 2250 J
   - Can be used both with Impact & Pedestrian configurations or as stand-alone protection.
5. **Pedestrian Rails + Impact Barriers**
   - Pedestrian + Impact | 6700 J
   - Pedestrian + Impact High | 8000 J
   - Pedestrian + Double Impact | 8300 J
   - Essential Pedestrian + Impact High | 3100 J
6. **Pedestrian Gate** | 0 J
7. **Column Guard** | 1800 J
8. **Topple Barriers**
   - Pedestrian | 5250 J
   - Impact | 6200 J
9. **Dock Gate** | 10200 J
10. **Height Restrictors**
    - Goal Post | 4200 J
    - Height Guard
11. **Upright Protector**