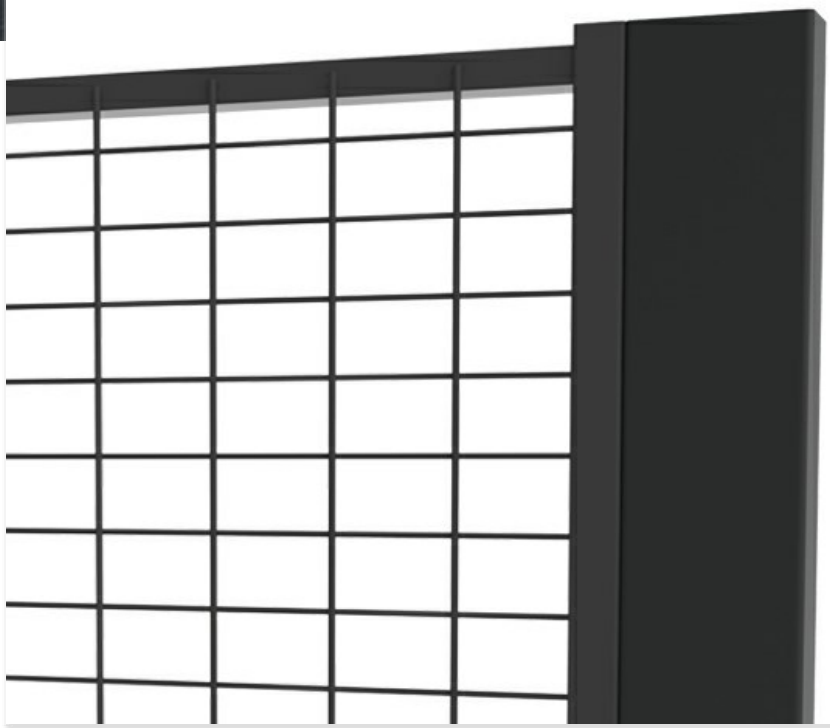
Passbit fast/justerbar

Passbit används som kompliment då det är viktigt för kunden att skyddet har ett visst breddmått. De fasta passbitarna finns tillgängliga i alla höjder samt i två olika bredder. Standard utförande är RAL 9011 men kan även anpassas efter kundens behov.

Den justerbara passbiten täcker gap mellan 40-145 mm vilket betyder större flexibilitet. Tillgängliga höjder är 1300, 1900 samt 2200 mm. Intervallen på 100 mm mellan våra paneler innebär färre kapningar av paneler när en ”udda” spalt ska täckas. Finns som lagervara i RAL 9011 men kan även fås i önskad kulör.



The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.




Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.

Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.

Modeller

Fast passbit 10 artiklar

ARTIKLAR / BESKRIVNING	BREDD (MM)	HÖJD (MM)
 **T02-3-07504**	40	750
 **T02-3-07507**	70	750
 **T02-3-13004**	40	1300
 **T02-3-13007**	70	1300
 **T02-3-19004**	40	1900
 **T02-3-19007**	70	1900
 **T02-3-22004**	40	2200
 **T02-3-22007**	70	2200
 **T02-3-24004**	40	2400
 **T02-3-24007**	70	2400

Justerbar passbit 5 artiklar

ARTIKLAR / BESKRIVNING	BREDD (MM)	HÖJD (MM)
 **T05-3-07515** 40-145 mm		750
 **T05-3-13015** 40-145 mm		1300

	**T05-3-19015** 40-145 mm	1900
	**T05-3-22015** 40-145 mm	2200
	**T05-3-24015** 40-145 mm	2400