

Stort pelarskydd

Axellent erbjuder ett större pelarskydd för det mest flexibla skyddet för större pelare. Detta skydd är lämpligt för 400 mm kvadratiska pelare som standard. Det finns även fyllningar tillgängliga för att utöka skyddet upp till 1000 mm i kvadrat. Pelarskyddet är tillverkat i polyeten med låg densitet för att ge hög flexibilitet och styrka.



Modeller

ARTIKLAR / BESKRIVNING	BREDD (MM)	HÖJD (MM)
 AG-CP400 RAL 1003	200	1080
 AG-CP4-250IN Infill, RAL 1003	250	
 AG-CP4-110IN Infill, RAL 1003	110	

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
 4 connection sides
 Width:
 200 mm
 7 7/8"

Height:
 350 -
 1160 mm
 13 13/16" -
 45 11/16"





Essential
 2 connection sides
 Width:
 132 mm
 5 3/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

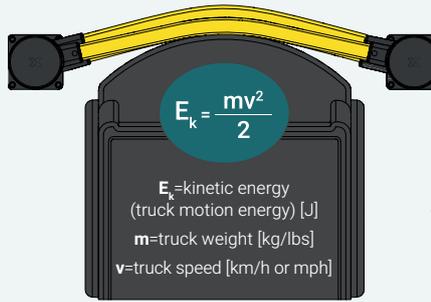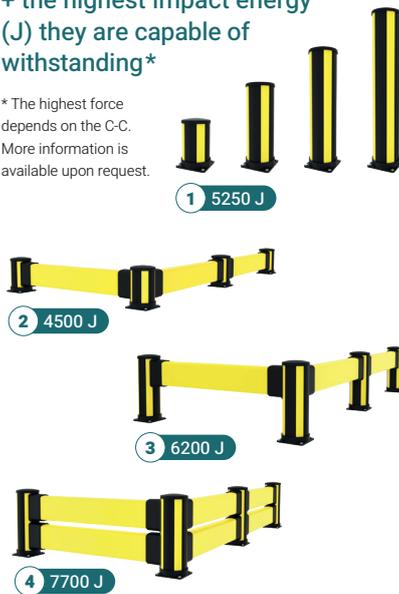

Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs



Loaded weight
2700 kg / 5940 lbs



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J

Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J





Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C



1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

* The Floor Barrier can be used in combination with configurations: 3, 6, 8 & 9