# Infill sheet metal fixed/adjustable

The X-Guard infill sheet metal is a practical solution for filling gaps in machine guarding panels. Available in fixed (40 and 70 mm) or adjustable (40–145 mm) widths, it ensures a secure and seamless fit within industrial safety systems. Standard color: RAL 9011.

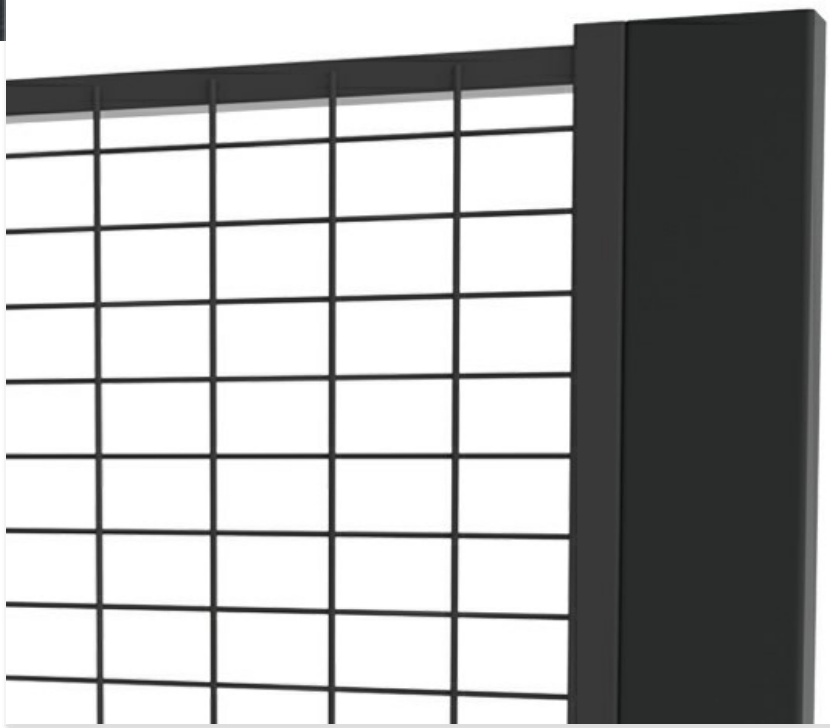

The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.

Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.

Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.

# Models

## Fixed infill sheet metal 10 articles

| ARTICLES / DESCRIPTION | WIDTH (MM) | HEIGHT (MM) |
|---|---|---|
| **T02-3-07504** | 40 | 750 |
| **T02-3-07507** | 70 | 750 |
| **T02-3-13004** | 40 | 1300 |
| **T02-3-13007** | 70 | 1300 |
| **T02-3-19004** | 40 | 1900 |
|  **T02-3-19007** | 70 | 1900 |
| **T02-3-22004** | 40 | 2200 |
|  **T02-3-22007** | 70 | 2200 |
|  **T02-3-24004** | 40 | 2400 |
| **T02-3-24007** | 70 | 2400 |

## Adjustable infill sheet metal 5 articles

| ARTICLES / DESCRIPTION | WIDTH (MM) | HEIGHT (MM) |
|---|---|---|
| **T05-3-07515** 40-145 mm | | 750 |
| **T05-3-13015** 40-145 mm | | 1300 |

| | | |
|---|---|---|
| | **T05-3-19015**<br>40-145 mm | 1900 |
| | **T05-3-22015**<br>40-145 mm | 2200 |
| | **T05-3-24015**<br>40-145 mm | 2400 |