


# Pedestrian

Use the X-Protect Pedestrian barrier configuration to define pedestrian routes and protect from light duty impacts. It is also possible to combine with a pedestrian gate. The pedestrian gate is self closing, provided with a universal handle and width is adjustable from 690-1210 mm.



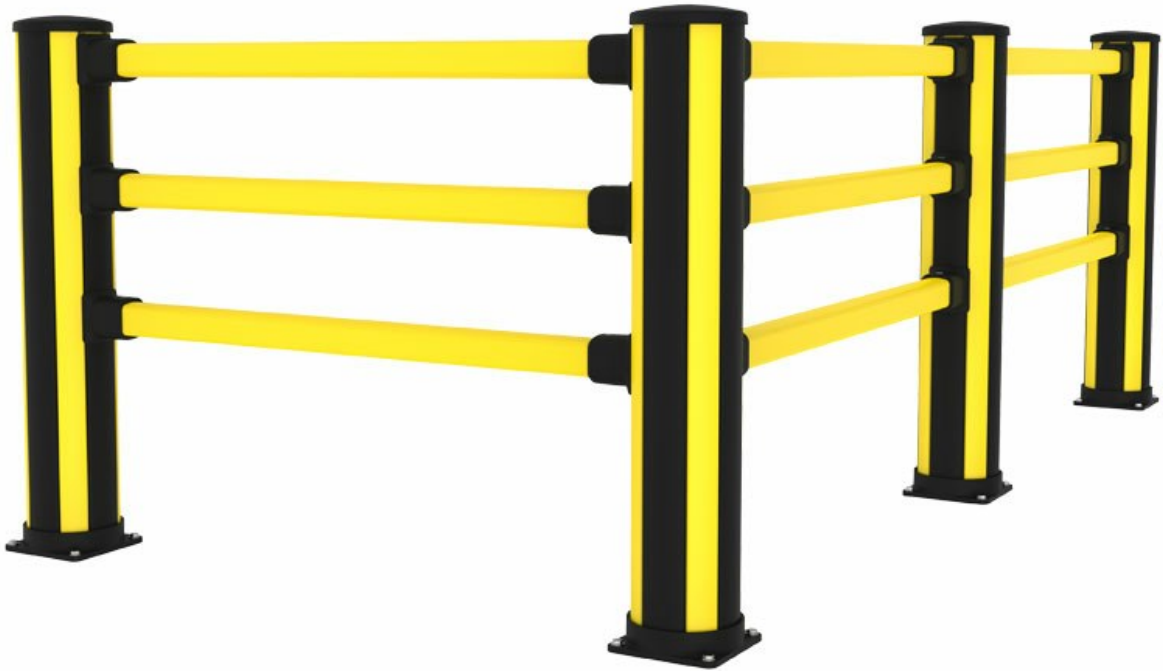


X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

<b>Impact test results</b>					
<i>Area of impact</i>	<i>Load</i>	<i>Equivalent to</i>		<i>90° Deflection</i>	<i>Force to fixings</i>
Centre of barrier C - C as below					
1500mm	4000 J	2500 kg 6.4 km/h	5000 kg 4.5 km/h	365mm	8 kN
Posts					
End post	1900 J	2500 kg 4.4 km/h	5000 kg 3.1 km/h	NA *	10 kN
Mid post	1900 J	2500 kg 4.4 km/h	5000 kg 3.1 km/h	NA *	8.4 kN






\* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

# Models

## Posts 3 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 <b>BCC0-116-00P3</b> Pedestrian corner	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 <b>BCM0-116-00P3</b> Pedestrian mid	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 <b>BCE0-116-00P3</b> Pedestrian end	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

## Hand rails 5 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 <b>RCP1-027-0050</b> Hand rail		500	Zinc Yellow (RAL 1018)
 <b>RCP1-047-0070</b> Hand rail		700	Zinc Yellow (RAL 1018)
 <b>RCP1-077-0100</b> Hand rail		1000	Zinc Yellow (RAL 1018)
 <b>RCP1-127-0150</b> Hand rail extrusion, C-C=1500mm, RAL 1018 yellow		1500	Zinc Yellow (RAL 1018)
 <b>RCP1-177-0200</b> Hand rail extrusion		2000	Zinc Yellow (RAL 1018)

## Gate 1 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 <b>GCP8-069-0121</b>			

## Related products

---



### X-PROTECT PEDESTRIAN

#### Pedestrian gate

Universally handed, self closing and width adjustable from 690mm to 1210 mm.

1 articles



#### Pedestrian with impact

Use the X-Protect Pedestrian + Impact barrier configuration to protect walkways from medium duty vehicles where there is an increased risk of ground level impacts. It is also possible to combine wi...

16 articles



#### Pedestrian with impact high

Use the X-Protect Pedestrian + Impact high barrier configuration to protect walkways from medium duty vehicles where there is a reduced risk of ground level impacts. It is also possible to combine...

16 articles

### X-Protect components

These are the building blocks of our modular Impact Protection range.

#### BARRIERS & RAILS

##### Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

##### Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

#### POSTS & BOLLARDS

**Classic**  
 4 connection sides

Height: 350 – 1160 mm  
 Width: 200 mm  
 13 13/16" – 45 11/16"

**Essential**  
 2 connection sides

Height: 620 – 1170 mm  
 Width: 132 mm  
 24 7/16" – 46 1/16"

### X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding\*

\* The highest force depends on the C-C. More information is available upon request.



### Impact testing

This is how we calculate the energy from a vehicle impact.


Speed	Load	Speed	Load	Speed	Load
6 km/h   3.7 mph	5020 J	6 km/h   3.7 mph	3770 J	6 km/h   3.7 mph	2930 J
8 km/h   5 mph	8880 J	8 km/h   5 mph	6660 J	8 km/h   5 mph	5180 J
12 km/h   7.5 mph	19960 J	12 km/h   7.5 mph	14970 J	12 km/h   7.5 mph	11670 J

#### Component Colours

● RAL 1018 ● RAL 9011

#### Operating temperature

-10°C → 40°C



#### 1. Bollards

- Classic | 5220 J
- Essential | 1500 J

#### 2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

#### 3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

#### 4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

#### 5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

#### 6. Pedestrian Gate | 0 J

#### 7. Column Guard | 1800 J

#### 8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

#### 9. Dock Gate | 10200 J

#### 10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

#### 11. Upright Protector