


# Double Impact Barrier

Use the X-Protect Double Impact Barrier configuration to protect structures from high level, heavy duty impacts. It is one of our strongest Impact protection configurations.

Our modular rails and bollards allow for damaged or worn parts to be replaced at a component level. If you need to replace any component - it is just a slide away.



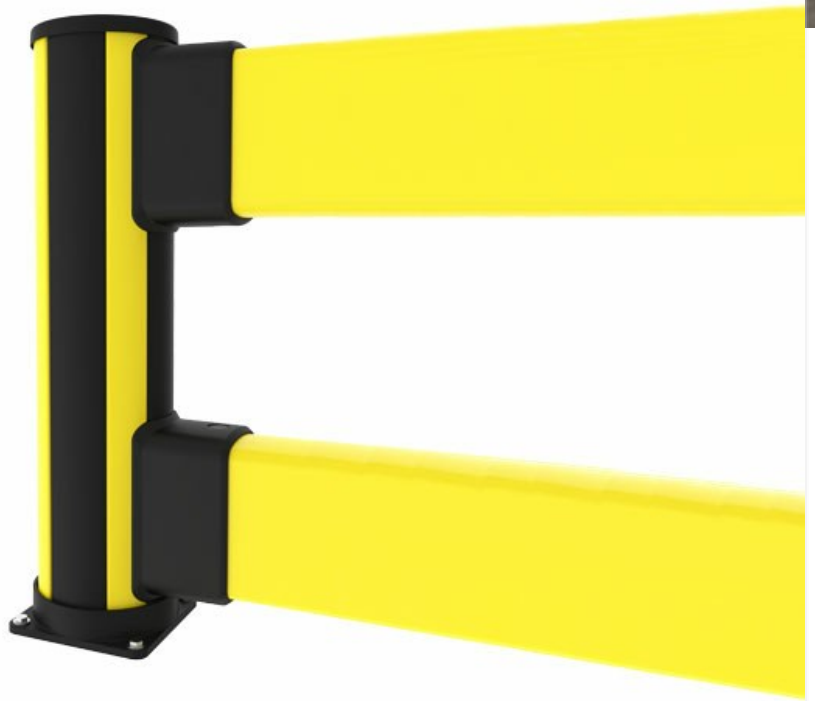


X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

Impact test results					
Area of impact	Load	Equivalent of		90° Deflection	Force to fixings
Centre of barrier C - C as below					
2000mm	7000 J	2500 kg 8.5 km/h	5000 kg 5.6 km/h	430mm	14.5 kN
2500mm	6500 J	2500 kg 8.2 km/h	5000 kg 5.3 km/h	470mm	12.2 kN
3000mm	6200 J	2500 kg 8 km/h	5000 kg 5.1 km/h	520mm	10.4 kN
Posts					
End post	6100 J	2500 kg 4.9 km/h	5000 kg 3.5 km/h	NA*	19.2 kN
Mid post	6100 J	2500 kg 4.9 km/h	5000 g 3.5 km/h	NA*	18.1 kN

\* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection will be reduced.

## Models

### Posts 3 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 <b>BCE0-087-I200</b> Double Impact end	870			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 <b>BCM0-087-I200</b> Double Impact mid	870			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 <b>BCC0-087-I200</b> Double Impact corner	870			Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

## Impact rails 9 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	LENGTH (MM)	CC (MM)	COLOR
 <b>RCI1-027-0050</b> Impact rail		270	500	Zinc Yellow (RAL 1018)
 <b>RCI1-047-0070</b> Impact rail		470	700	Zinc Yellow (RAL 1018)
 <b>RCI1-067-0090</b> Impact rail		670	900	Zinc Yellow (RAL 1018)
 <b>RCI1-077-0100</b> Impact rail		770	1000	
 <b>RCI1-127-0150</b> Impact rail		1270	1500	Zinc Yellow (RAL 1018)
 <b>RCI1-177-0200</b>		1770	2000	Zinc Yellow (RAL 1018)
 <b>RCI1-197-0220</b> Impact rail		1970	2200	Zinc Yellow (RAL 1018)
 <b>RCI1-227-0250</b> Impact rail		2270	2500	Zinc Yellow (RAL 1018)
 <b>RCI1-277-0300</b> Impact rail		2770	3000	Zinc Yellow (RAL 1018)

## Related products

---



### CLASSIC PEDESTRIAN

#### **Pedestrian Barrier with Impact**

Use the X-Protect Pedestrian Barrier with Impact configuration to protect walkways from medium duty vehicles where there is an increased risk of ground level impacts. It is also possible to combine...

16 articles



### X-PROTECT IMPACT PROTECTION

#### **Impact High Barrier**

Use the X-Protect Impact High Barrier for high level impact protection. It is ideal for segregating light weight vehicles or defining warehouse zones. Our modular rails and bollards allow for damage...

13 articles



### X-PROTECT IMPACT PROTECTION

#### **Impact**

Use the X-Protect Impact Barrier for ground level impact protection. It is ideal for segregating light weight vehicles or defining warehouse zones. Our modular rails and bollards allow for damaged...

12 articles



### X-PROTECT IMPACT PROTECTION

#### **Double Impact Low Barrier**

Use the X-Protect Double Impact Low Barrier configuration to protect structures from ground level, heavy duty impacts. It is one of our strongest Impact protection configurations and also&nbsp;idea...

12 articles

### X-Protect components

These are the building blocks of our modular Impact Protection range.

#### BARRIERS & RAILS

##### Pedestrian Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

##### Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

#### POSTS & BOLLARDS

**Classic**  
 4 connection sides

Height: 350 – 1160 mm  
 Width: 200 mm | 13 13/16" – 7 7/8" | 45 11/16"

**Essential**  
 2 connection sides

Height: 620 – 1170 mm  
 Width: 132 mm | 24 7/16" – 5 3/16" | 46 1/16"

### X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding\*

\* The highest force depends on the C-C. More information is available upon request.



### Impact testing

This is how we calculate the energy from a vehicle impact.

Loaded weight  
**3600 kg / 7930 lbs**

Loaded weight  
**2700 kg / 5940 lbs**

Loaded weight  
**2100 kg / 4620 lbs**

Speed	Load
6 km/h   3.7 mph	5020 J
8 km/h   5 mph	8880 J
12 km/h   7.5 mph	19960 J

Speed	Load
6 km/h   3.7 mph	3770 J
8 km/h   5 mph	6660 J
12 km/h   7.5 mph	14970 J

Speed	Load
6 km/h   3.7 mph	2930 J
8 km/h   5 mph	5180 J
12 km/h   7.5 mph	11670 J

#### Component Colours

● RAL 1018 ● RAL 9011

#### Operating temperature

-10°C → 40°C



#### 1. Bollards

- Classic | 5220 J
- Essential | 1500 J

#### 2. Impact Barriers

- Impact | 4500 J
- Impact High | 6200 J
- Double Impact Low | 7700 J
- Double Impact High | 7000 J

#### 3. Pedestrian Rails

- Pedestrian | 5000 J
- Essential Pedestrian | 2250 J
- Essential Pedestrian 2 rail | 1700 J
- Essential Pedestrian | 2250 J

#### 4. Floor Barrier | 2250 J

- Can be used both with Impact & Pedestrian configurations or as stand-alone protection.

#### 5. Pedestrian Rails + Impact Barriers

- Pedestrian + Impact | 6700 J
- Pedestrian + Impact High | 8000 J
- Pedestrian + Double Impact | 8300 J
- Essential Pedestrian + Impact High | 3100 J

#### 6. Pedestrian Gate | 0 J

#### 7. Column Guard | 1800 J

#### 8. Topple Barriers

- Pedestrian | 5250 J
- Impact | 6200 J

#### 9. Dock Gate | 10200 J

#### 10. Height Restrictors

- Goal Post | 4200 J
- Height Guard

#### 11. Upright Protector