


Vulplaat

Een vulplaat wordt gebruikt in gevallen waar de afscherming van een bepaalde breedte dient te zijn. Vulplaten zijn leverbaar in alle hoogtes en in twee breedtes. 40 en 70 mm. De standaard kleur is zwart (RAL 9011), maar de vulplaat kan geleverd worden in iedere gewenste kleur.

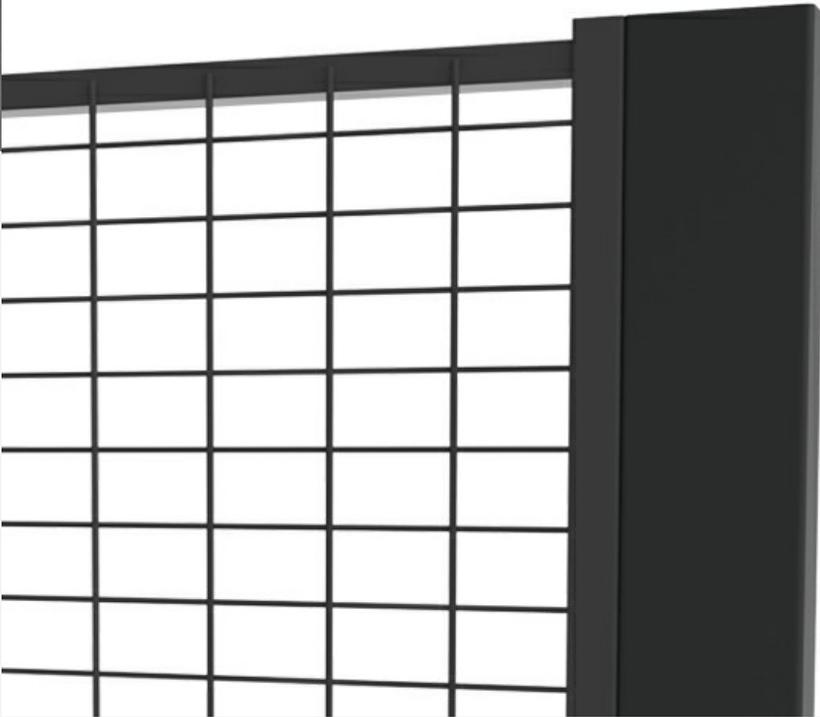

The X-Guard infill sheet metal is designed to close gaps in machine guarding panels, ensuring a safe and seamless fit in industrial safety applications. Whether a fixed or adjustable width is required, these infill pieces help create a complete barrier without excessive panel cutting.

Fixed infill pieces are available for all standard heights in 40 mm and 70 mm widths. For greater flexibility, the adjustable infill piece covers gaps ranging from 40 mm to 145 mm, making it easier to adapt to different guard widths.

Thanks to the 100 mm interval between X-Guard panels, the need for custom cutting is significantly reduced, simplifying installation. The infill pieces come in RAL 9011 (black) as standard, with other colors available upon request.

Ideal for machine guarding systems, these infill panels help maintain a professional and safe environment while ensuring compliance with industrial safety standards.

Modellen

Vaste montage bit 10 artikelen

ARTIKELEN / OMSCHRIJVING	BREEDTE (MM)	HOOGTE (MM)
 T02-3-07504	40	750
 T02-3-07507	70	750
 T02-3-13004	40	1300
 T02-3-13007	70	1300
 T02-3-19004	40	1900
 T02-3-19007	70	1900
 T02-3-22004	40	2200
 T02-3-22007	70	2200
 T02-3-24004	400	2400
 T02-3-24007	700	2400

verstelbare montage bit 5 artikelen

ARTIKELEN / OMSCHRIJVING	BREEDTE (MM)	HOOGTE (MM)
 T05-3-07515 40-145 mm		750
 T05-3-13015 40-145 mm		1300



T05-3-19015
40-145 mm

1900



T05-3-22015
40-145 mm

2200



T05-3-24015
40-145 mm

2400