

Voetgangerspoort

Universele handgreep, zelfsluitend en in breedte verstelbaar van 690 mm tot 1210 mm.




X-Protect is een unieke benadering van aanrijdbeveiligingen. Ongeëvenaarde modulariteit, met gebruik van slechts enkele systeemcomponenten en ingebouwde demping om een barrièresysteem te creëren dat verandert met uw werkplek. X-Protect maakt een snelle transformatie, reparatie of vervanging van bestaande barrières mogelijk en op maat gemaakte configuraties zijn grenzeloos.

Modellen

ARTIKELEN / OMSCHRIJVING	BREEDTE (MM)	KLEUR
 **GCP3-069-0121** Gate		Graphite Black (RAL 9011)

Gerelateerde producten



Pedestrian

Gebruik de X-Protect Pedestrian barrier om voetgangersroutes te definiëren en te beschermen tegen lichte belasting. Ook te combineren met een voetgangerspoort. De voetgangerspoort is zelfsluitend,...

9 artikelen



Pedestrian Barrier met Impact

Gebruik de configuratie Pedestrian Barrier met Impact barrier om looppaden te beschermen tegen middelzware voertuigen waar er een verhoogd risico is op botsingen op grondniveau. Ook te combineren m...

16 artikelen



Pedestrian Barrier met Impact High

Gebruik de Pedestrian Barrier met Impact High barrière configuratie om wandelpaden te beschermen tegen middelzware voertuigen met een verminderd risico op impact vanaf de grond. Het is ook mogelijk...

16 artikelen

X-PROTECT

Technical Information

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Pedestrian Rails



Width x Height:
68 × 72 mm | 2 11/16" × 2 27/32"
Length:
270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:
116 × 220 mm | 4 9/16" x 8 21/32"
Length:
270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic
4 connection sides
Width:
200 mm
7 7/8"
Height:
350 – 1160 mm
13 13/16" – 45 11/16"


Essential
2 connection sides
Width:
132 mm
5 3/16"
Height:
620 – 1170 mm
24 7/16" – 46 1/16"




X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

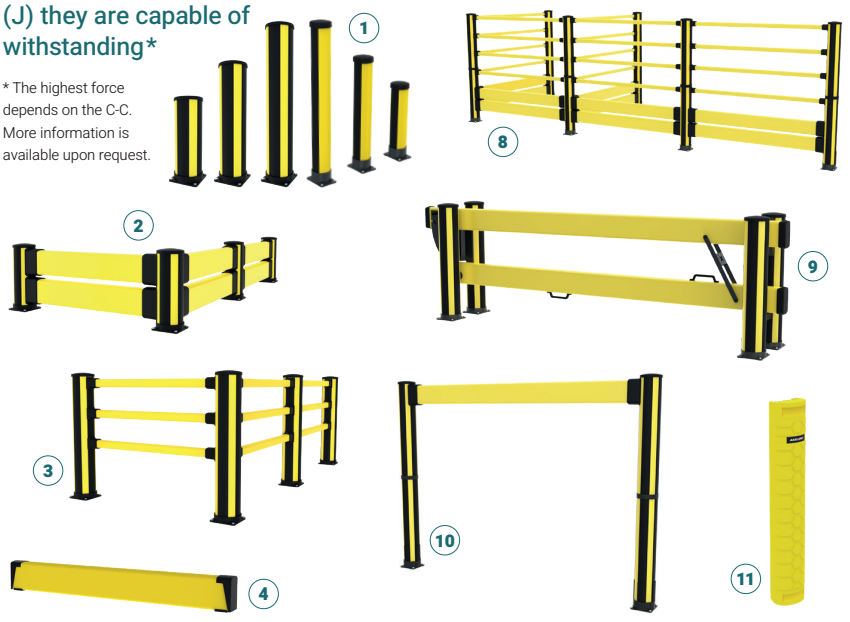

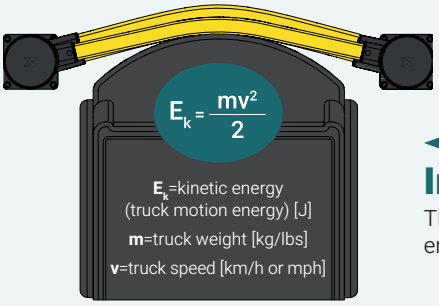


Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight
3600 kg / 7930 lbs

Speed	Load
6 km/h | 3.7 mph	5020 J
8 km/h | 5 mph	8880 J
12 km/h | 7.5 mph	19960 J



Loaded weight
2700 kg / 5940 lbs

Speed	Load
6 km/h | 3.7 mph	3770 J
8 km/h | 5 mph	6660 J
12 km/h | 7.5 mph	14970 J



Loaded weight
2100 kg / 4620 lbs

Speed	Load
6 km/h | 3.7 mph	2930 J
8 km/h | 5 mph	5180 J
12 km/h | 7.5 mph	11670 J

Component Colours

RAL 1018 RAL 9011

Operating temperature

-10°C → 40°C

1. **Bollards**
   - Classic | 5220 J
   - Essential | 1500 J
2. **Impact Barriers**
   - Impact | 4500 J
   - Impact High | 6200 J
   - Double Impact Low | 7700 J
   - Double Impact High | 7000 J
3. **Pedestrian Rails**
   - Pedestrian | 5000 J
   - Essential Pedestrian | 2250 J
   - Essential Pedestrian 2 rail | 1700 J
   - Essential Pedestrian | 2250 J
4. **Floor Barrier** | 2250 J
   - Can be used both with Impact & Pedestrian configurations or as stand-alone protection.
5. **Pedestrian Rails + Impact Barriers**
   - Pedestrian + Impact | 6700 J
   - Pedestrian + Impact High | 8000 J
   - Pedestrian + Double Impact | 8300 J
   - Essential Pedestrian + Impact High | 3100 J
6. **Pedestrian Gate** | 0 J
7. **Column Guard** | 1800 J
8. **Topple Barriers**
   - Pedestrian | 5250 J
   - Impact | 6200 J
9. **Dock Gate** | 10200 J
10. **Height Restrictors**
    - Goal Post | 4200 J
    - Height Guard
11. **Upright Protector**