


# Skyddsräcke för fotgängare

Använd staket för fotgängare för att markera gångbanor och skydda mot lätta stötar. Kombineras med fördel tillsammans med en grind.

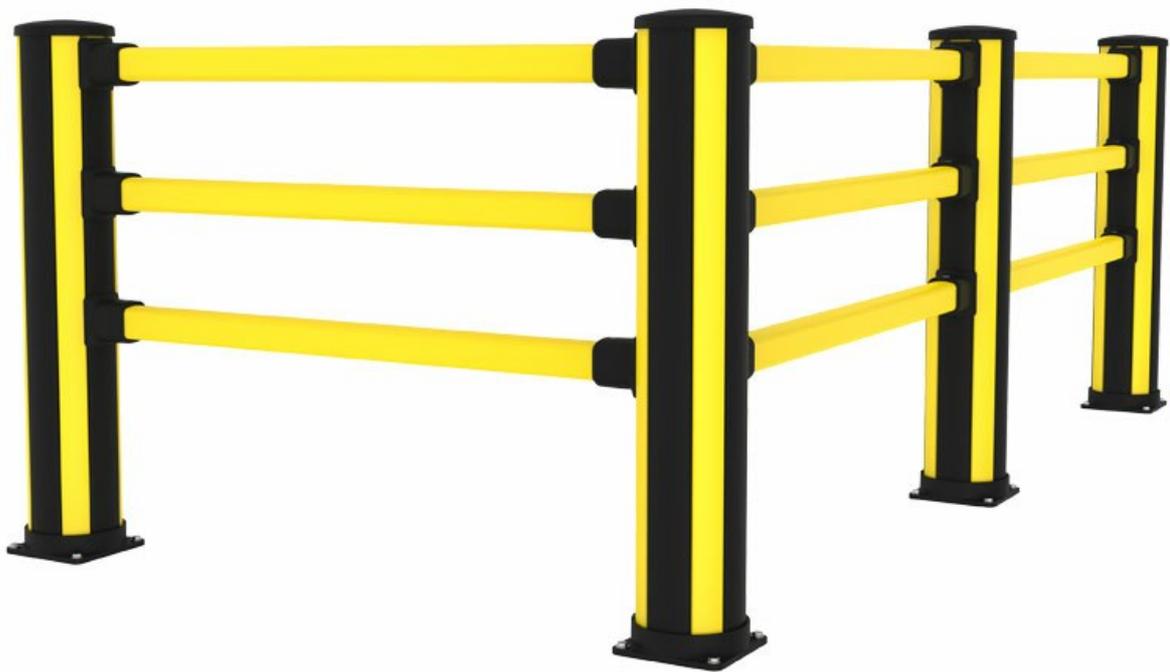

X-Protect är ett unikt sortiment av säkerhetsbarriärer. Överträffad modularitet, med endast ett fåtal systemkomponenter och dämpning som är inbyggd för att skapa ett barriärsystem som förändras med din arbetsplats. X-Protect tillåter snabb transformation, reparation eller utbyte av befintliga barriärer och skräddarsydda konfigurationer är obegränsade.

Impact test results					
Area of impact	Load	Equivalent to		90° Deflection	Force to fixings
Centre of barrier C - C as below					
1500mm	4000 J	2500 kg 6.4 km/h	5000 kg 4.5 km/h	360mm	14.3 kN
2000mm	5000 J	2500 kg 7.2 km/h	5000 kg 5 km/h	490mm	18.7 kN
Posts					
End post	1900 J	2500 kg 4.4 km/h	5000 kg 3.1 km/h	NA *	10 kN
Mid post	1900 J	2500 kg 4.4 km/h	5000 kg 3.1 km/h	NA *	8.4 kN

\* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

## Modeller

### Posts 6 artiklar

ARTIKLAR / BESKRIVNING	HÖJD (MM)	CC (MM)	FÄRG
 <b>BCC1-116-00P3</b> Hörnpollare	1160		Zinc Yellow (RAL 1018)
 <b>BCC0-116-00P3</b> Hörnpollare	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 <b>BCM1-116-00P3</b> Mittenpollare	1160		Zinc Yellow (RAL 1018)
 <b>BCM0-116-00P3</b> Mittenpollare	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)
 <b>BCE1-116-00P3</b> Avslutspollare	1160		Zinc Yellow (RAL 1018)
 <b>BCE0-116-00P3</b> Avslutspollare	1160		Zinc Yellow (RAL 1018) Graphite Black (RAL 9011)

## Hand rails 5 artiklar

ARTIKLAR / BESKRIVNING	HÖJD (MM)	CC (MM)	FÄRG
 <b>RCP1-177-0200</b> Räcke		2000	Zinc Yellow (RAL 1018)
 <b>RCP1-127-0150</b> Räcke		1500	Zinc Yellow (RAL 1018)
 <b>RCP1-077-0100</b> Räcke		1000	Zinc Yellow (RAL 1018)
 <b>RCP1-047-0070</b> Räcke		700	Zinc Yellow (RAL 1018)
 <b>RCP1-027-0050</b> Räcke		500	Zinc Yellow (RAL 1018)

## Gate 1 artiklar

ARTIKLAR / BESKRIVNING	HÖJD (MM)	CC (MM)	FÄRG
 <b>GCP8-069-0121</b> Grind X-Protect, 690-1210mm			

## Relaterade produkter

---



### X-PROTECT PEDESTRIAN

#### Grind för fotgängare

Självstängande och med en justerbar bredd på mellan 690-1210 mm.

1 artiklar



### CLASSIC PEDESTRIAN

#### Skyddsräcke för fotgängare med barriär

Använd staket för fotgängare tillsammans med ett skyddsräcke för att skydda gångbanor från medeltunga fordon där det finns en ökad risk för kollision på marknivå.

19 artiklar



### CLASSIC PEDESTRIAN

#### Skyddsräcke för fotgängare med hög barriär

Använd staket för fotgängare tillsammans med ett högt skyddsräcke för att skydda gångbanor från medeltunga fordon där det finns en liten risk för kollision på marknivå.&nbsp;

19 artiklar

### X-Protect components

These are the building blocks of our modular Impact Protection range.

#### BARRIERS & RAILS

##### Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

##### Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

#### POSTS & BOLLARDS



**Classic**  
 4 connection sides  
 Width:  
 200 mm  
 7 7/8"

Height:  
 350 -  
 1160 mm  
 13 13/16" -  
 45 11/16"





**Essential**  
 2 connection sides  
 Width:  
 132 mm  
 5 3/16"



### X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding\*

\* The highest force depends on the C-C. More information is available upon request.

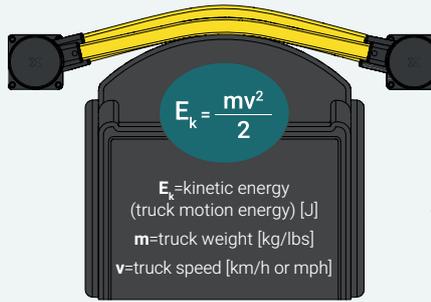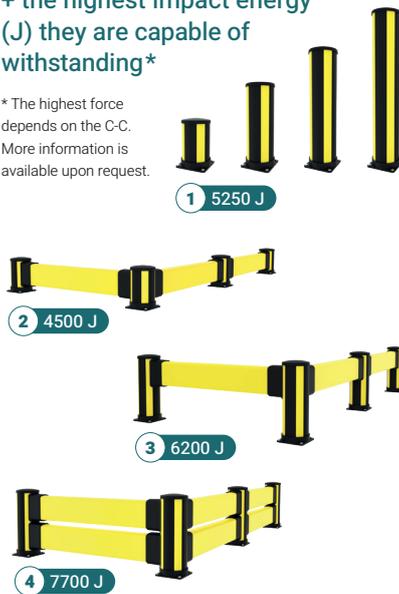

### Impact testing

This is how we calculate the energy from a vehicle impact.



Loaded weight  
**3600 kg / 7930 lbs**



Loaded weight  
**2700 kg / 5940 lbs**



Loaded weight  
**2100 kg / 4620 lbs**

Speed	Load
6 km/h   3.7 mph	5020 J
8 km/h   5 mph	8880 J
12 km/h   7.5 mph	19960 J

Speed	Load
6 km/h   3.7 mph	3770 J
8 km/h   5 mph	6660 J
12 km/h   7.5 mph	14970 J





Speed	Load
6 km/h   3.7 mph	2930 J
8 km/h   5 mph	5180 J
12 km/h   7.5 mph	11670 J

#### Component Colours

● RAL 1018 ● RAL 9011

#### Operating temperature

-10°C → 40°C



1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier\*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

\* The Floor Barrier can be used in combination with configurations: **3, 6, 8 & 9**